



**USED ON
AICHI**

USED ON AICHI



JOYSTICKS & CONTROL BOXES

ELECTRONIC JOYSTICKS



Single-axis
 Used on SV06, 08CNL,
 SV2032/263, TZ12A/ITZ40A
REF [150TA9746](#)



Single-axis
 Used on SR21A, SP12-400C/
 SP14-460CJ, SP12C/SP14C,
 SR18, 21A(J)/ISR60, 70(J)
REF [150TA9747](#)



Single-axis
 Used on SR14CJ, SR21A, SR14C,
 SR12C, SR12-400C/SR14-460CJ
REF [150TA9745](#)



Single-axis
 Used on SR123/ISR403, RZ150/
 IRZ500, SR182/ISR602, SR210/
 ISR700, SR182, SR123, RZ090
REF [145TA3097](#)



Single-axis
 Used on SR12B, ISR40B,
 SR12B(J), ISR40B(J)
REF [150TA9743](#)

BELLOWS



- Biggest inner diameter top: 6,5 mm
- Biggest inner diameter bottom: 32 mm
- Height: 34 mm

Used on SR21A, SP12-400C/
 SP14-460CJ, SP12C/SP14C,
 SR18, 21A(J)/ISR60, 70(J)
REF [150TA9654](#)



- Biggest inner diameter top: 7 mm
- Biggest inner diameter bottom: 32 mm
- Height: 33,5 mm

Used on SR21A, SV06C/SV08C,
 SP18A/SP21A(J)/SP25B, SR18,
 21A(J), SV06CNL/SV08CNL
REF [150TA9653](#)

USED ON AICHI




PRINTED CIRCUIT BOARDS



Interface card

Used on SR123/ISR403, SR182/ISR602

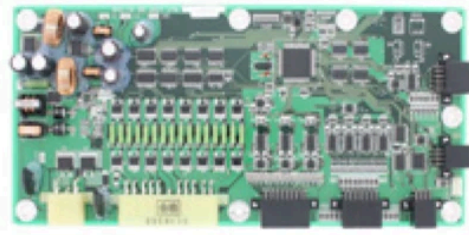

Controller

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J)

Although these electronic cards may resemble the one fitted on your mobile elevating work platform there can be a big difference. Therefore we always ask you to supply us with part number or full vehicle details before ordering a similar unit.

This is just a small selection of our electronic boards. For all other types, please feel free to call us!

CONTROLLERS & PRINTED CIRCUIT BOARDS

USED ON AICHI



ELECTRICAL PARTS

BACK-UP ALARM



- Voltage: 12-24 V
- Volume: 85 dB
- Conformity: not approved
- Dimensions: 45,5 x Ø 46,2 mm

Used on SR21A, SR210, SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP25A/ISP830, SP25A

REF [126TA6161](#)

CABLE LOOMS



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 32 m
- Number of plugs: 5

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), SP18A(J)/SP21A(J)/SP2

REF [165TA3832](#)



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 32,2 m
- Number of plugs: 5

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), SP18A(J)/SP21A(J)/SP2

REF [165TA3834](#)



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 9,1 m
- Number of plugs: 6

Used on SV60CNL/SV08CNL

REF [165TA3833](#)



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18,65 m
- Number of plugs: 4

Used on SR12B(J)/ISR40B(J)

REF [150TA9790](#)



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18,44 m
- Number of plugs: 7

Used on SR123/ISR403

REF [150TA9788](#)



- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18 m
- Number of plugs: 6

REF [150TA9789](#)



- Cable type: < 6 mm²
- Type of loom: multiple cables
- Total length: 25,5 m
- Number of plugs: 6

Used on SR182/ISR602, SR182

REF [150TA9787](#)



- Cable type: < 6 mm²
- Type of loom: multiple cables
- Total length: 25,86 m
- Number of plugs: 7

Used on SR182/ISR602

REF [150TA9786](#)

USED ON AICHI



ELECTRICAL PARTS

CONTACTOR



- Voltage: 24 V
- Maximum current interrupted: 100 A
- Maximum current uninterrupted: 100 A
- Magnetic blowouts: no
- Dust cover: enclosed version

Used on SR123/ISR403, RZ150/IRZ500, SR210/ISR700, SR182/ISR602, SR123J/ISR403J

REF [165TA3835](#)

RELAYS



Voltage: 24 V

Used on SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)

REF [150TA9645](#)



Voltage: 24 V

Used on SR21A, SV06C/SV08C, SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)

REF [131TA2686](#)



Voltage: 24 V

Used on SR123/ISR403, SR123J/ISR403J, RZ090

REF [145TA2432](#)



Voltage: 24 V

Used on SR123/ISR403, SR123J/ISR403J

REF [150TA9644](#)

DASHBOARD WARNING LIGHTS



Built-in diameter: 11 mm

Used on SR21A, SV06C/SV08C, SR12B(J)/ISR40B(J), TZ12A/ITZ40A, TZ15B/ITZ50B

REF [150TA9587](#)



Lens colour: green

Used on SV06, 08CNL/SV2032, 263, SV06C/SV08C, SV06CNL/SV08CNL

REF [165TA3836](#)

USED ON AICHI



ELECTRICAL PARTS

CONTROL PANEL HOUSING



- Length: 220 mm
- Width: 225 mm
- Height: 120 mm

Used on SV06C/SV08C,
SV06CNL/SV08CNL

REF [150TA9631](#)

PROTECTIVE COVER



- Length: 216 mm
- Width: 125 mm
- Height: 176 mm

Used on SV06CNL, SV08CNL,
SV06C, SV08C

REF [150TA9744](#)

SERVOMOTOR



- Voltage: 24 VDC
- Length: 140 mm
- Width: 120 mm
- Height: 150 mm

REF [150TA9552](#)

ELECTRIC MOTOR



- Minimum voltage: 12 VDC
- Total length: 140 mm
- Diameter: 106 mm
- Cable length: 690 mm

Used on SR12B(J)/ISR40B(J)

REF [150TA9593](#)

LINEAR ACCELERATOR



Dimensions: 215 x 88 x 50 mm

REF [165TA3837](#)

USED ON AICHI



SWITCHES

KEY SWITCHES



- Number of positions: 5
- Built-in diameter: 22 mm
- With key number: K30

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)/SP2, SP25A/ISP830

REF [110TA7785](#)

Spare part key



REF [110TA3109](#)



- Number of positions: 3
- Built-in diameter: 22 mm
- With key number: 6896

Used on SR12-400C/SR14-460CJ, SV06C/SV08C, SP12V/SP14C, SV06-08CNL/SV2032-263, SR14CJ, SR14C, SR12C

REF [150TA9633](#)

Spare part key



REF [141TA2679](#)

EMERGENCY SWITCH



- Built-in diameter: 22 mm
- Current: 10 A
- Voltage: 600 VAC
- NC contact

Used on SP25A/ISP830, SR12B(J)/ISR40B(J), SP350, SR123/ISR403

REF [146TA4839](#)

USED ON AICHI



SWITCHES

LIMIT SWITCHES



- Number of NO contacts: 4
- Number of NC contacts: 2
- Current: 5 A

Used on SR182/ISR602, SR210/ISR700, SR123/ISR403, RZ090

REF [146TA8300](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 2 A

Used on SR14CJ, SR21A, SR14C, SR12C, SR12-400C/SR14-460CJ, SV06C/SV08C, SP12C/SP14C, SP18A/SP21A(J)/SP25B

REF [146TA8337](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 2 A

Used on SR14CJ, SR14C, SR12C, SR12-400C/SR14-460CJ

REF [146TA8340](#)



- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 3 A

Used on SR123/ISR403, RZ150/IRZ500, RZ150, SR210/ISR700, SR182/ISR602, RV093/IRV303-90, RV123/IRV403-90

REF [127TA2381](#)

USED ON AICHI



SWITCHES

TOGGLE SWITCHES						
	Position	Number of connections	Voltage	Current	Used on	REF
			V	A		
	On-off-on	3	125/250	6	SV06C/SV08C, SV06CNL/SV08CNL, SR123, SR182, SV06-08CNL/SV2032-263	146TA8322
	On-on	3	125/250	6	SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SV06C/SV08C, SP12C/SP14C, SR210, SR18-21A(J)/ISR60-70(J)	146TA8323
	On-off-on	3	125/250	6	SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SR210, SR18-21A(J)/ISR60-70(J), SP18A/SP21A(J)/SP25B	146TA8324
	On-off-on	3	125/250	6	SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SP12-400C/SP14-460CJ, SV06C/SV08C, SP12C/SP14C	146TA8325
	On-off-on	6	125/250	6	SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SP12-400C/SP14-460CJ, SR210, SP12C/SP14C	146TA8328

SPECIAL NUT



Used on SR14CJ, SR21A, SR14C, SR12C, SV06C/SV08C, SP12C/SP14C, SR18-21A(J)/ISR60-70(J), SP18A/SP21A(J)/SP25B

REF [150TA9719](#)

RUBBER CAP



- Diameter: 16 mm
- Height: 13 mm

Used on SR210, SR12B(J)/ISR40B(J), SR123/ISR403

REF [150TA9655](#)

USED ON AICHI



SWITCHES

FOOT SWITCHES



Used on SR123/ISR403, RZ150/
IRZ500, SR210/ISR700

REF [146TA8356](#)



Used on SR21A, SR12-400C/
SR14-460CJ, SP18, 21A(J)/
ISP60, 70(J), SP12C/14C, SP25A/
ISP830, SP25A, SP350

REF [146TA9481](#)



Foot switch cover

Used on SR210, SP25A/ISP830,
SP25A, SR12B(J)/ISR40B(J),
RZ150, SR210/ISR700, RZ090,
RV123/IRV403-90

REF [150TA9676](#)

BUTTONS



- NO contact
- Current: 10 A
- Voltage: 600 V

Used on SR14CJ, SR21A, SR12C,
SR12-400C/SR14-460CJ, SR18,
21A(J)/ISR60, 70(J)

REF [146TA8330](#)



- NO contact
- Current: 10 A
- Voltage: 600 V

Used on SR210, SR123/ISR403,
RZ150/IRZ500, RZ150, SR210/
ISR700, SR182/ISR602, SR123/
ISR403J

REF [146TA8331](#)

SWITCH



Single-axis

Used on SV06CNL, SV08CNL

REF [165TA3838](#)

USED ON AICHI



SENSORS

PROXIMITY SENSORS



- Height: 93 mm
- Length: 150 mm
- Voltage: 24 VDC
- Switch type: stroke sensor

Used on SP18, 21A(J)/ISP60, 70(J), TZ12A/ITZ40A, TZ15B/ITZ50B, SR21A, SR18A/SP21A(J)/SP2, SR18(J)/SR21A(J)

REF [150TA9640](#)



- Height: 150 mm
- Length: 150 mm
- Voltage: 24 VDC
- Switch type: distance sensor

Used on SR12A, SP18A/SP21A(J) SP25B, SP18-21A(J)/ISP60-70, SR18-21A(J), SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

REF [150TA9670](#)

TILT SENSOR



- Dimensions: 52,5 x 48 mm
- Detection: 5°
- Switch type: angle sensor

Used on SR21A, SR12-400C/SR14-460CJ, SP18, 21A(J)/ISP60, 70(J), SP12C/14C, SP25A/ISP830, SP350, RZ150/IRZ500, SR123/ISR403

REF [150TA9671](#)

LENGTH SENSORS



- Housing diameter: 180 mm
- Number of pins: 4
- Switch type: length sensor

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

REF [165TA3839](#)



- Housing diameter: 160 mm
- Number of pins: 4
- Switch type: length sensor

Used on SP18, 21A(J)/ISP60, 70(J), SP25A/ISP830, SP25A, SP350, SP350/ISP1150, SR18, 21A(J)/ISR60, 70(J)

REF [150TA9642](#)

ANGLE SENSOR



- Diameter shaft: 6 mm
- Cable length: 205 mm
- Number of pins: 3

Used on SR21A, SP18A/SP21A(J)/SP25B, SR18, 21(J), TZ12A/ITZ40A, TZ16, 20A/ITZ52, 65A, SP18, 21A(J)/SP2

REF [150TA9641](#)

USED ON AICHI



INDICATORS & HOUR METERS

HOUR METER



- Voltage: 12-60 VDC
- Depth: 23,8 mm
- Width: 35,4 mm
- Length: 54 mm

Used on SR14CJ, SR21A,
SR12C, SR12-400C/
SR14-460CJ, SP12C/SP14C

REF [112TA4854](#)

USED ON AICHI




HYDRAULIC PARTS

HYDRAULIC MOTOR




Type of flange

Type A



Type of shaft

Type F



- Thread connections: 1/2" BSP
- Type of flange: A
- Type of shaft: F
- Total length: 190 mm

Used on SR210, SR182/ISR602, SR210/ISR700, SR182, SR123/ISR403, SR123/ISR403J

REF [150TA9739](#)

HYDRAULIC PUMPS



- Total length: 313 mm
- Neck diameter: 101,5 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR182/ISR602, SR182

REF [150TA9742](#)



- Total length: 332,5 mm
- Neck diameter: 101,6 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR210, RZ150/IRZ500, SE210/ISR700

REF [150TA9741](#)



- Total length: 265 mm
- Neck diameter: 82,5 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR123/ISR403, RZ090, SR123J/ISR403J

REF [150TA9740](#)

HYDRAULIC PUMP GROUPS



- Relais: 24 VDC
- Electric motor: 1,7 kW

Used on ISR60/70, SR18A(j)/SR21A, SP18A/SP21A(j), SP25B, SP25A, SP350, TZ12A, TZ16, TZ20A, TZ15B

REF [150TA9737](#)



- Relais: 12 VDC
- Electric motor: 0,9 kW

Used on SR12/400C, SR14/460C, SR12C, SR14C, SR14CJ, SP12C, SP14C

REF [165TA3840](#)

USED ON AICHI



HYDRAULIC PARTS

PRESSURE VALVES (FLOW)



- Thread: M30 x 1,5 mm
- Length: 124 mm

Used on SR123/ISR403, RZ090, SR123J/ISR403J

REF [150TA9690](#)



- Valve code: 26560-25001
- Length: 160 mm

Used on SR210, SP25A/ISP830, SP25A/ISP830, SR182/ISR602, SR210/ISR700, SP350/ISP1150

REF [165TA3844](#)

CONTROL VALVE



Dimensions: 123 x 99 mm

Used on SR12B(J)/ISR40B5(J)

REF [165TA3842](#)

SOLENOID VALVES



Length: 112,5 mm

Used on SR210, SR123/ISR403, SR210/ISR700, SR182/ISR602, RV093-123/IRV303-403-90

REF [165TA3841](#)



Length: 135 mm

Used on SR21A, SR18-21A(J)/ISR60-70(J), SR18-21A(J), SP18-21A(J)/ISR60-70(J)

REF [165TA3843](#)

USED ON AICHI



HYDRAULIC PARTS

CARTRIDGES WITH COIL



Length: 212 mm

Used on SP18A/SP21A(J)/
SP25B, SR18-21A(J),
SR18-21A(J)/ISR60-70(J)

REF [150TA9597](#)



Length: 213 mm

REF [150TA9596](#)

Cartridges exist in a variety of dimensions and wiring diagrams. When placing an order, always provide the necessary info with regard to the wiring diagram, as cartridges may have identical dimensions yet be connected in different ways.

COIL



- Height: 52 mm
- Diameter: 16,1 mm
- Voltage: 12 V
- Resistance: 11,8 Ω

Used on SR14CJ, SR14C,
SR12C

REF [165TA3845](#)

GEAR



- Outer diameter: 164 mm
- Total height: 112,8 mm
- Number of teeth: 30

Used on SR210, SP25A/ISP830,
SP25A, SP350, SR123/ISR403,
SR182/ISR602, SR210/ISR700,
SR182, SR123J/ISR403J

REF [165TA3847](#)

HYDRAULIC HOSES



- Length: 715 mm
- Pressure: 175 bar

REF [150TA9735](#)



- Length: 15 620 mm
- Pressure: 155 bar

Used on SR21A, SR18-21A(J)/ISR60-70(J), SR18-21A(J),
SP18-21A(J)/SP2, SP18-21A(J)/ISP60-70(J)

REF [165TA3846](#)

USED ON AICHI



HYDRAULIC PARTS

SYNFLEX HOSES



- Hydraulic hose
- Length: 13,4 m
- Pressure: 210 bar
- Coupling: 2 x 1/4" BSP

Used on SR14J, SR14C, SR12C

REF [150TA9736](#)



- Hydraulic hose
- Length: 7,5 m
- Pressure: 210 bar
- Coupling: 2 x 1/4" BSP

Used on SR123/ISR403, SR123

REF [165TA3850](#)

GLASS LEVEL GAUGE



- Length: 102 mm
- Width: 20 mm
- Without thermometer

Used on SR210, SR123/ISR403, RZ150/IRZ500, RZ150, RZ090, SR182/ISR602

REF [165TA3848](#)

GREASE NIPPLE



- Total height: 76 mm
- Key width: 17 mm
- Thread: M16 x 1,5 mm

Used on SR12B(J)/ISR40B(J)

REF [165TA3851](#)

FITTING FOR HYDRAULIC CIRCUIT



Hydraulic fitting: 1/2" BSP

REF [150TA9599](#)

PINION SHAFT



- Outer diameter: 70 mm
- Total height: 240 mm
- Number of teeth: 17

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)

REF [165TA3849](#)

FILLER CAP



- Height: 30 mm
- Outer diameter: 97,5 mm
- Inner diameter: 60 mm

Used on SR21A, SP18A/ST21A(J)/SP25B, SR18, 21A(J), SR18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

REF [150TA9784](#)

USED ON AICHI



ENGINE PARTS

MUFFLER



- Total length: 430 mm
- Diameter body: 225 mm
- Outer diameter smallest tube: 55 mm
- Outer diameter biggest tube: 61 mm

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

REF [165TA3852](#)

EXHAUST PIPE



- Length: 185 mm
- Outer diameter smallest tube: 43 mm
- Outer diameter biggest tube: 43 mm

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

REF [165TA3855](#)

FUEL PUMP



- Voltage: 24 V
- Total height: 97 mm
- Centre distance: 66 mm
- Number of holes: 2

Used on SR18A, 21A(J)/ISR60, 70(J)

REF [165TA3853](#)

TIMING BELT SET



- Number of teeth: 91
- Dimensions: 72 x 33 mm

REF [151TA2356](#)

ENGINE STOP COIL



- Voltage: 24 V
- Type of current: DC
- Function: pull
- Mounting side: both sides
- Length: 146 mm

Used on SR123/ISR403, RZ090, SR123J/ISR403J

REF [165TA3854](#)

ALTERNATORS



- Voltage: 24 V
- Current: 15 A
- Centre distance: 155 mm

REF [103TA3638](#)



- Voltage: 24 V
- Current: 20 A
- Centre distance: 148 mm

REF [165TA3856](#)

USED ON AICHI



ENGINE PARTS

STARTERS



- Voltage: 24 V
- Power: 3,5 kW
- Number of teeth: 9

REF [165TA3857](#)



- Voltage: 24 V
- Power: 4,5 kW
- Number of teeth: 9

REF [165TA3858](#)

USED ON AICHI



DOOR HANDLE



- Length: 54 mm
- Width: 45 mm

Used on SR123/ISR403, RZ090, SR123, ST123J/ISR403J

REF [150TA9749](#)

BODY & CHASSIS PARTS

WEAR PADS

	Length mm	Material	Used on	REF
	42,5	Plastic	SR210, RZ150, RZ150/RZ500, SR210/ISR700, SR182/ ISR602,SR182	150TA9619
	43	Plastic	SR123/ISR403, RZ090, SR123J/ISR403J, SR123	150TA9621
	60	Plastic	SR18,21A(J)/ISR60,70(J), SR18, 21A(J), SP18, 21A(J)/ ISP60, 70(J)	150TA9622
	80	Plastic	SR123/ISR403, RZ090, SR123/ ISR403-90, SR123	150TA9700
	100	Plastic	SR210, SP350, RZ150, RZ150/ IRZ500, SR182/ISR602, SR210/ISR700	150TA9617

USED ON AICHI



BODY & CHASSIS PARTS

WEAR PADS

	Length mm	Material	Used on	REF
	100	Plastic	SR21A, SR18,21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B	150TA9613
	100	Plastic	SR210, RZ150/IRZ500, SR210/ISR700, SR182/ISR602, SR182	150TA9699
	100	Plastic	SR210, SRZ150/IRZ500, RZ150, SR182/ISR602, SR210/ISR700, SR182	150TA9624
	150	Plastic	SR123/ISR403, SR123J/ISR403J, RZ090, SR123	150TA9612
	185	Plastic	SR21A, SR18,21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SR18, 21A(J)	150TA9703

CABLE GUIDE



- Outside dimensions: 95 x 48 mm
- Inside dimensions: 76 x 35 mm
- Material: plastic
- Quantity of links: 142

Used on SR14CJ, SR12C

REF [165TA3859](#)

USED ON AICHI



UPRIGHT PARTS



- Length: 153 mm
- Width: 34 mm
- Height: 83 mm

Used on SP12-400C/SP14-460CJ

REF [165TA3860](#)



- Diameter: 80 mm
- Height: 9 mm

Used on SR18-21A(J)/
ISR60-70(J), SP18-21A(J)/
ISR60-70(J), SR12B(J)/ISR40B(J)

REF [150TA9678](#)

CHASSIS ACCESSORY



- Length: 680 mm
- Height: 430 mm

Used on SV06CNL/SV08CNL

REF [165TA3862](#)

SUPPORTS - PIECES OF CONNECTIONS



- Number of holes: 2
- Material: cast iron

Used on SR123/ISR403, RZ090

REF [150TA9610](#)



- Number of holes: 4
- Material: metal

Used on SP25A/ISP830, SP25A,
SP350, SR123/ISR403, SP350/
ISP1150, SR123J/ISR403J

REF [150TA9683](#)



- Number of holes: 4
- Material: metal

Used on SR21A, SR18-21A(J)/
ISR60-70(J), SP18-21A(J)/
SP25B, SR18-21A(J)

REF [165TA3861](#)



- Number of holes: 4
- Material: metal

Used on, SR18-21A(J)/
ISR60-70(J), SP18-21A(J)/
ISR60-70(J), SR21A, SR12B(J)/
ISR40B(J), SP18-21A(J)/SP25B

REF [150TA9684](#)

USED ON AICHI



BODY & CHASSIS PARTS

HINGES



- Length: 48 mm
- Width: 40 mm
- Height: 20 mm
- Diameter of the holes: 5 x 12 mm

Used on SR14CJ, SR12A, SR210, SR18-21A(J)/ISR60, 70(J), SR18-21A(J), SP25A/ISP830

REF [150TA9750](#)



- Length: 60 mm
- Width: 40 mm
- Height: 10,5 mm
- Diameter of the holes: 6 x 4,3 mm

Used on SR12B(J)/ISR40B(J)

REF [150TA9752](#)

COVER



- Total length: 8,2 mm
- Inner diameter: 70 mm
- Outer diameter: 140 mm

Used on SR210, SR123/ISR403, SR182/ISR602, SR210/ISR700, SR182

REF [150TA9591](#)

BALL SCREW



- Total length: 179 mm
- Diameter shaft: 50 mm
- Length of the screw: 70 mm

Used on SR210, SR123/ISR403, SR182

REF [150TA9686](#)

HOSE REEL SHEAVE



- Inner diameter: 15,4 mm
- Outer diameter: 45 mm
- Width: 16,8 mm
- Material: plastic


Used on SR21A, SP18A/SP21A(J)/SP25B, SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), TZ16, 20A/ITZ25-65A

REF [165TA3863](#)

USED ON AICHI



STEEL CABLES



- Total length: 4225 mm
- Diameter: 8,3 mm

Used on SR123/ISR403, SR123, SR 123J/ISR403J

REF [150TA9765](#)



- Total length: 8100 mm
- Diameter: 12,3 mm

Used on SR123/ISR403, SR123, SR 123J/ISR403J

REF [150TA9764](#)



- Total length: 8320 mm
- Diameter: 12,3 mm

Used on SR12B(J)/ISR40B(J)

REF [165TA3864](#)

USED ON AICHI



COVERS & ACCESSORIES

GAS SPRING



- Type of spring: push type
- Centre distance: 670 mm

Used on SR210, SE12B(J)/ISR403, RZ150, SR210/ISR700,
SR182/ISR602, RZ090


REF 150TA9706

USED ON AICHI



DECALS


DECALS

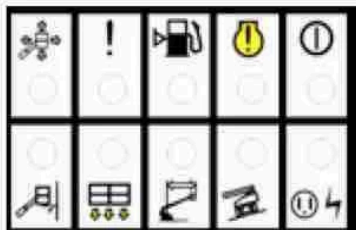

- Length: 101 mm
- Height: 64 mm

Used on SR14CJ, SR14C, SR12C, SP12-400C/SP14-460CJ


REF [163TA3962](#)



- Length: 70 mm
- Height: 90 mm

Used on SR21A, SP12C/SP14C, SR18-21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SR18, 21A(J)

REF [138TA2576](#)



- Length: 440 mm
- Height: 32 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B


REF [138TA2883](#)



- Length: 440 mm
- Height: 32 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B


REF [165TA3865](#)

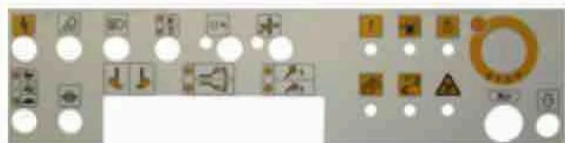

- Length: 535 mm
- Height: 133 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B

REF [138TA2884](#)



- Length: 206 mm
- Height: 200 mm

Used on SV06CNL/SV08CNL


REF [138TA3335](#)



- Length: 95 mm
- Height: 161 mm

Used on SR14CJ, SR14C, SR12C, SP12-400C/SP14-460CJ

REF [150TA9630](#)

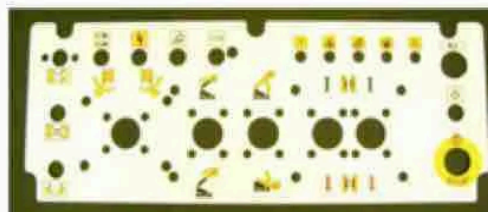

- Length: 590 mm
- Height: 224 mm

Used on SR12B(J)/ISR40B(J)

REF [138TA1767](#)

USED ON AICHI



DECALS

DECALS



- Length: 720 mm
- Height: 190 mm

Used on SR123/ISR403


REF [150TA9794](#)



- Length: 534 mm
- Height: 133 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/SR21A(J)

REF [126TA9587](#)



- Length: 395 mm
- Height: 32 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/SR21A(J)

REF [126TA9589](#)



- Length: 395 mm
- Height: 32 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/SR21A(J)

REF [126TA9588](#)

USED ON AICHI



PNEUMATIC TYRE



- Skid steer tubeless pneumatic tyre
- Dimensions: 385 x 65 x 19,5

Used on SP18A-21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)

REF [165TA3868](#)

TRACTION WHEEL



- Diameter wheel: 406 mm
- Number of bolt holes: 5
- Width wheel: 127 mm
- Shaft hole diameter: 95 mm

Used on SV06CNL/SV08CNL

REF [150TA9693](#)

ANTI-PUNCTURE TYRE



Used on SP18A-21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)

REF [165TA3869](#) - LH

REF [165TA3870](#) - RH

TRACK ROLLERS

	Maximum diameter	Total width	Smallest centre distance between mounting holes	Largest centre distance between mounting holes	Used on	REF
	mm	mm	mm	mm		
	76	183			SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J)	143TA8888
	100	190	50	147	SR12B(J)/ISR40B(J)	165TA3866
	116	196	42	110	SR12, SR210, SR18A/SR21A, SR182, SR182/ISR602, SR210/ISR700	165TA3867
	134	146			SR12B(J)/ISR40B(J), SR14CJ, SR14C, SR12C	143TA8869

WHEELS, TYRES & RUBBER TRACKS

USED ON AICHI





WHEELS, TYRES & RUBBER TRACKS

TRACK ROLLERS

	Maximum diameter	Total width	Smallest centre distance between mounting holes	Largest centre distance between mounting holes	Used on	REF
	mm	mm	mm	mm		
	134	193	51	150	SR14CJ, SR14C, SR12C	143TA8850
	135	176	50	148,3	SR12B(J)/ISR40B(J)	143TA8849
	158	235	90	204	SR123/ISR403, RV093, SR123/IRV303, 403-90, RZ090, RV123/IRV403-90, SR123	144TA6599
	164,5	278	102	239	SR210, SR182, SR18A/SR21A, SR182/ISR602, SR210/ISR700	143TA8566

TRACK SPROCKETS

	Number of teeth	Number of mounting holes	Inner diameter	Outer diameter	Used on	REF
			mm	mm		
	19	9	230	429	SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J)	143TA9072
	21	15	325	603	SR18A/SR21A	143TA9013

IDLER



- Total height: 600 mm
- Diameter of the wheel: 380 mm

Used on SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J)

REF [143TA9565](#)

USED ON AICHI



RUBBER TRACKS NON-MARKING

	Colour	Width mm	Number of links	Pitch length mm	Type	REF
	White	150	45	60	X40RC, X40RC3	165TA3871
	White	200	42	72	RV040, RV041, RM040	165TA3872
	White	200	56	72	RV060, RV061, RX061	134TA8201

WHEELS, TYRES & RUBBER TRACKS

TRACK PARTS



- Rubber clip-on pad for steel plate
- Width: 450 mm

REF [165TA3873](#)

- Rubber clip-on pad for steel plate
- Width: 500 mm

REF [152TA2180](#)

UNDERCARRIAGE PART



- Total length: 190 mm
- Diameter mounting holes:
34,8 - 22 - 12,2 mm

Used on SR14CJ, SR14C,
SR12C, SR12B(J)/ISR40B(J)REF [165TA3874](#)

USED ON AICHI



NOTES

A large area of horizontal dotted lines for taking notes.