

USED ON GENIE



BODY & CHASSIS PARTS


SAFETY CAGE PARTS



- Length: 1420 mm
- Height: 940 mm
- Width: 90 mm

Used on GS-3390, GS-3384, GS-84

REF [160TA6450](#)

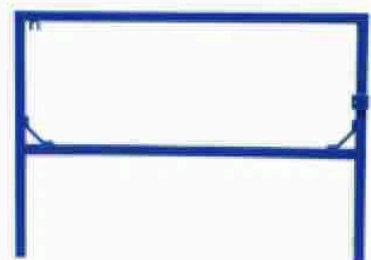

- Length: 1365 mm
- Height: 940 mm
- Width: 40 mm

Used on GS-3390, GS-3384, GS-84, S-80

REF [160TA9831](#)



- Length: 1420 mm
- Height: 940 mm
- Width: 40 mm

Used on GS-3390, GS-3384, GS-84


REF [160TA8562](#)



- Length: 1575 mm
- Height: 950 mm

Used on GS-30, GS-1530 from serial n° 00001 to 75999

REF [160TA6359](#)

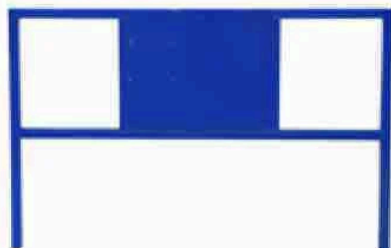

- Length: 1600 mm
- Height: 995 mm
- Width: 40 mm

Used on GS-3390, GS-3384, GS-84

REF [161TA1509](#)

USED ON GENIE




SAFETY CAGE PARTS



- Length: 1600 mm
- Height: 990 mm
- Width: 40 mm


REF [161TA1561](#)

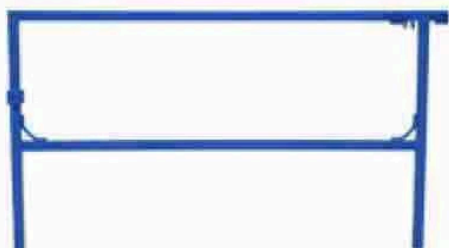

- Length: 1738 mm
- Height: 939,1 mm
- Width: 38,1 mm

Used on GS-3390, GS-3384, GS-84.


REF [160TA7929](#)

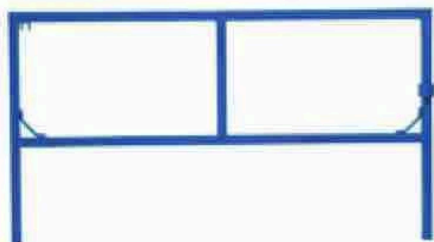

- Length: 1770 mm
- Height: 940 mm
- Width: 40 mm

Used on GS-3390, GS-3384, GS-84


REF [160TA9876](#)

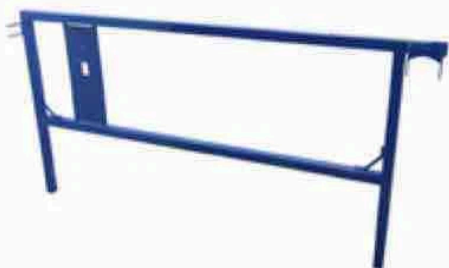

- Length: 1830 mm
- Height: 902,1 mm
- Width: 40 mm

Used on GS-2668RT, GS-2668DC, GS-2668

REF [160TA9692](#)

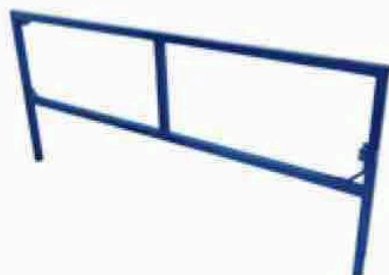

- Length: 2075 mm
- Height: 940 mm
- Width: 40 mm

Used on GS-3390, GS-3384, GS-84

REF [160TA9728](#)

USED ON GENIE



BODY & CHASSIS PARTS


SAFETY CAGE PARTS



- Length: 2201 mm
- Height: 610,2 mm
- Width: 39 mm

Used on GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032


REF [160TA6809](#)

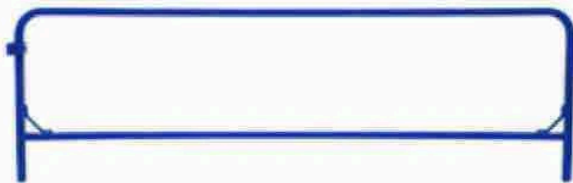

- Length: 2335 mm
- Height: 665
- Width: 40 mm

Used on GS-2046

REF [160TA9039](#)

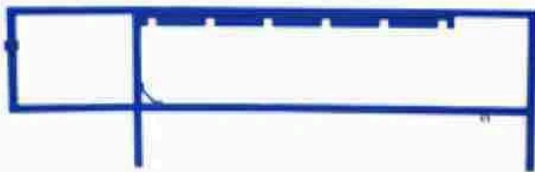

- Length: 2760 mm
- Height: 825 mm
- Width: 40 mm

Used on GS-2668RT

REF [160TA6585](#)



- Length: 1750 mm
- Height: 567,8 mm

Used on S-100, Z-60/34, S-80, S-60, S-120, Z-80/60, Z-135/70, S-40, ZX-135/70, S-80X, SX-180

REF [160TA9596](#)



- Length: 2200 mm
- Height: 150 mm


Used on GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032

REF [160TA9581](#)

USED ON GENIE



SAFETY CAGE PARTS

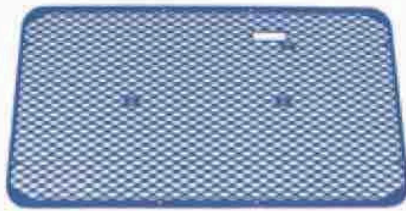

- Length: 1340 mm
- Width: 680 mm

Used on Z-34/22N, Z-34/22 IC, Z-40/23 N

REF [160TA6335](#)



- Length: 1450 mm
- Height: 1020 mm

Used on Z34/22N(N/DC/BI-ENERGY), Z34/22IC, Z34/22N-Z34/22DC

REF [160TA7906](#)



- Length: 2201,5 mm
- Height: 160 mm

Used on GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032

REF [160TA8637](#)



- Length: 330 mm
- Width: 172 mm
- Height: 165 mm

Used on S-60, S-100, S-120, S-80, S-40, S-80X, Z-45/25, Z-135/70, Z-60/34, Z-80/60, ZX-135/70

REF [160TA7985](#)



- Length: 135 mm
- Width: 25 mm
- Height: 78 mm

Used on GS-30, GS-1530 from serial n° 00001 to 75999, GS-2646, GS-2032, GS-2046

REF [161TA2023](#)










- Length: 12 mm
- Width: 9 mm

REF [127TA2737](#)

USED ON GENIE



BODY & CHASSIS PARTS

SUPPORTS - PIECE OF CONNECTION				
	Number of holes	Material	Used on	REF
	14	Metal	Z-30/20N, Z-34/22N, Z-34/22IC, Z-34/22 IC, Z34/22 DC	160TA9845
	2	Metal	GS-2032, GS-2046, GS-1530 from serial n° 00001 to 75999	127TA2759
	5	Metal	GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032, GS-2046, GS-4047	160TA9026
	5	Metal	GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032, GS-2046	160TA5704
	6	Metal	GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032, GS-4047, GS-2646 AV	160TA7687
	6	Metal	GS2032/3246, GS1530/3246, GS30/32/46, GS4047	161TA4006
	7	Metal	GS-3390, GS-2668 RT, GS-3384, GS-84, GS-2669BE, GS-2668RT, GS-2669DC, GS-2668	160TA9562

USED ON GENIE



FORMING FOR CONTROL BOX



- Length: 365 mm
- Width: 187 mm
- Height: 310 mm

Used on GS-2669 DC, GS-1530, GS-2032, GS-2669DC, GS-4047, GS-2646 AV

REF [160TA9306](#)

LOAD WHEELS



- Diameter wheel: 128 mm
- Width wheel: 38,3 mm
- Diameter shaft: 19 mm

Used on GS-3390, GS-3384, GS-84

REF [161TA4878](#)



- Diameter wheel: 153 mm
- Width wheel: 50 mm
- Diameter shaft: 19 mm

Used on SUPERLIFT CONTRACTOR, AWP SUPER SERIES, AWP from serial n° 0000-00000 to 9999-99999, SUPERLIFT ADVANTAGE, SUPER TOWER, POWERED SUPERLIFT ADVANT., POWERED SUPERLIFT

REF [151TA2526](#)



- Diameter wheel: 146 mm
- Width wheel: 25 mm
- Diameter shaft: 25,6 mm

Used on GS2032, GS1530/1930, GS20323246, GS1530/1532/1930/1932, GS4047, GS2046/2646/32

REF [127TA2729](#)

PULLEYS



- Inner diameter sheave: 34,9 mm
- Largest outer diameter: 118 mm
- Total width: 11,8 mm
- Inner diameter bushing/bearing: 12,7 mm

Used on SUPERLIFT ADVANTAGE, SUPERLIFT CONTRACT, SUPER TOWER, DPL25S/30S/35S

REF [165TA3889](#)



- Inner diameter sheave: 30,3 mm
- Largest outer diameter: 119 mm
- Total width: 15,5 mm
- Inner diameter bushing/bearing: 12,6 mm

Used on SUPER TOWER, SUPERLIFT CONTRACTOR, DPL25S/30S/35S, DPL25S/30S/ DPL3

REF [139TA1824](#)

USED ON GENIE



BODY & CHASSIS PARTS

IDLER WHEEL



- With bearing medium
- Width outer ring: 17,6 mm
- Max diameter inner ring: 18,9 mm
- Width inner ring: 15,5 mm
- Max diameter outer ring: 76,1 mm

Used on AWP from serial n° 0000-00000 to 9999-99999, EASY-UP, IWP, COMPACT PERSONNEL LIFT, GENIE IWP

REF [140TA2813](#)

HOSE REEL SHEAVES



- Inner diameter: 10 mm
- Outer diameter: 49,5 mm
- Width: 9 mm
- Material: plastic

Used on AWP SUPER SERIES, QS-12R, GR-12, RUNABOUT, GR-8, DPL-25S, CWP-8S, IWP SUPER SERIES, CWP SUPER SERIES

REF [161TA1797](#)



- Inner diameter: 47 mm
- Outer diameter: 76 mm
- Width: 25,4 mm
- Material: PVC

Used on GR-12, RUNABOUT, AWP SUPER SERIES, GR-8, DPL-25S, CWP-8S, IWP SUPER SERIES, QS-12R, CWP SUPER SERIES

REF [160TA9601](#)

USED ON GENIE



HINGES



- Length: 102 mm
- Width: 63,5 mm
- Diameter of the holes: 7,1 mm

Used on GS-30, GS-2032,
GS-1530, GS-4047, GS-2646 AV

REF [160TA9095](#)



- Length: 102 mm
- Width: 63,5 mm
- Diameter of the holes: 7,1 mm

Used on GS-30, GR-12, GRC-12,
QS-12R, GTH-1056, GTH-844,
GTH-636, GS-1530

REF [161TA1187](#)



- Length: 102 mm
- Width: 77,5 mm
- Diameter of the hole: 10,2 mm

Used on GS2669/3369/4069DC, GS3390/5390, TZ50,
GS3384, GS84/90

REF [128TA3394](#)



- Length: 151 mm
- Width: 102 mm
- Height: 3 mm

Used on Z-45/25IC from serial n° 9996 to 99999, Z-40/23N,
Z-34/22IC, S-80, Z-60/34, Z-34/22N, Z-45/25, S-120, S-100,
Z-80/60, S-40, Z-135/70, Z-51/30J, S-60, Z-45/25DC from
serial n° 9996 to 99999, Z-34/22 IC, Z-45/25J, Z-45/25
BI-ENERGY, Z34/22 DC, ZX-135/70, S-80X, Z-34/22,
Z-40/23 N, Z-33/18, SX-180

REF [161TA1524](#)



- Length: 280 mm
- Width: 63 mm
- Height: 11 mm
- Diameter of the holes: 7,1 mm

Used on GRC-12, GS-3390,
GR-12, GS-3384, GS-84,
GTH-1048, QS-12R, GTH-1056,
GTH-844

REF [160TA9264](#)



- Length: 710 mm
- Width: 75 mm
- Diameter of the hole: 5 mm

Used on S-60, S-100, Z-60/34,
S-80, Z-45/25IC from serial n°
9996 to 99999, Z-51/30J,
Z-45/25, S-120, Z-80/60, S-40,
Z-45/22DC, Z-135/70, Z-45/22,
ZX-135/70, S-80X, SX-180

REF [160TA8499](#)



- Length: 70 mm
- Width: 53 mm
- Diameter of the hole: 7,2 mm

Used on GS2669/3369/4069DC,
GS2032/3246,
GS2669/3369/4069R, GRC12,
GS1530/1532/1930/1932

REF [127TA2707](#)

USED ON GENIE



BODY & CHASSIS PARTS

KNOBS



- Outer diameter: 38 mm
- Inner diameter: 17,7 mm
- Height: 22,5 mm

Used on GS-30, GR-12, GS-1530 from serial n° 00001 to 75999, GS-2668 DC, GS-2032, GS-2668 RT, GRC-12, QS-12R, GS-2668DC, GS-2668RT, GS-4047, GS-2668, GS-2646 AV

REF [160TA9770](#)



- Outer diameter: 60 mm
- Inner diameter: 9,7 mm
- Height: 34 mm

Used on RUNABOUT, CWP-8S, GR-8, AWP SUPER SERIES, GR-12, IWP SUPER SERIES, CWP SUPER SERIES

REF [161TA1759](#)

PUSH-PULL ROD



- Diameter of the holes: 25,4 mm
- Centre distance of the holes: 1058,1 mm
- Maximum length: 1108,9 mm

Used on Z-45/25J, Z-45/25, Z-45/25DC from serial n° 9996 to 99999

REF [160TA7689](#)

STEERING KNUCKLES



- Steering knuckle RH or LH: LH
- King pin diameter: 128 mm
- Steering connection diameter: 25,4 mm
- Length: 199 mm

Used on GS-2668 DC, GS-2668 RT, GS-2668DC, GS-2668RT, GS-2668

REF [161TA1822](#)



- Steering knuckle RH or LH: RH
- King pin diameter: 128 mm
- Steering connection diameter: 25,4 mm
- Length: 199 mm

Used on GS-2668 DC, GS-2668 RT, GS-2668DC, GS-2668RT, GS-2668

REF [161TA1916](#)

PART DIFFERENTIAL



- Diameter: 63,5 mm
- Number of mounting holes: 6

Used on S-40, Z-34/22IC, Z-34/22N, Z-30/20N, Z-45/25IC from serial n° 9996 to 99999, Z-45/22, Z-60/34, Z-45/25, Z-34/22, GS-3390, Z-30/20, Z-51/30J, Z-34/22 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-34/22G, Z-34/22 IC, Z-45/22DC, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC

REF [161TA1015](#)

USED ON GENIE



COUPLING



- Height: 25 mm
- Outer diameter: 150,4 mm
- Inner diameter: 78 mm
- Number of splines: 50

Used on GS-2668 RT,
Z-34/22 IC, GS-2668RT,
GS-2668

REF [160TA8314](#)

BALL JOINT ROD END



- Outer diameter: 19,2 mm
- Inner diameter: 6,3 mm
- Height: 30,3 mm

Used on S-40, S-60, Z-45/25,
Z-51/30J, Z-45/25IC from
serial n° 9996 to 99999,
Z-62/40

REF [160TA9198](#)

TORQUE HUB



- Flange: 242 mm
- Neck diameter: 178 mm
- Diameter: 260 x 280 mm

Used on S40/45, Z45/25IC-Z45/25J IC, Z51/30J, Z45/22,
Z30/20N, Z34/22N-Z34/22DC

REF [128TA3139](#)

PART REDUCTOR



- Outer diameter: 63,5 mm
- Inner diameter: 12,7 mm
- Biggest inner diameter: 19,05 mm
- Height: 33,3 mm
- Material: steel

Used on Z-34/22IC, Z-34/22N, Z-60/34, Z-30/20N, S-40,
Z-45/25IC from serial n° 9996 to 99999, Z-45/22, Z-45/25,
Z-34/22, GS-3390, Z-30/20, Z-51/30J, Z-34/22 BI-ENERGY,
Z-45/25DC from serial n° 9996 to 99999, Z-34/22G,
Z-34/22 IC, Z-45/22DC, Z-45/25J, Z-45/25 BI-ENERGY,
Z34/22 DC

REF [161TA1469](#)

REDUCTOR HUB



- Gear ratio: 1:57
- Diameter maximum: 280 mm
- Length reductor: 250 mm
- Bolt side 1: 9 x 5/8" UNF
- Bolt side 2: 6 x 5/8" UNF

Used on S-40, Z-34/22IC, Z-45/25IC from serial n°
9996 to 99999, GS-3390, GS-3384, Z-51/30J, GS-84,
Z-34/22 IC, Z-45/25, Z-45/22 MP









REF [161TA1299](#)

USED ON GENIE



BODY & CHASSIS PARTS

STEEL CABLES

	Total length mm	Diameter mm	Used on	REF
	10 890	10	S-100, S-120, S-3800	160TA9071
	1430	3,1	GR-12, QS-12R	161TA1156
	7900	3,97	GENIE LIFT, LIFT, GL-4, GS-2668 RT	160TA9205
	12 800	5,55	SUPERLIFT ADVANTAGE	128TA3332
	16 993	5,55	SUPERLIFT ADVANTAGE, SUPER TOWER	128TA3337
	20 650	5,55	SUPERLIFT ADVANTAGE, SUPER TOWER	128TA3334
	19 202	4,76	SUPERLIFT CONTRACTOR, SUPER TOWER	128TA3336
	9150	5,55	SUPERLIFT ADVANTAGE, MIX N MATCH	128TA3342

CONTROL CABLE



- Total length: 3250 mm
- Diameter: 1,50 mm

REF [128TA3333](#)

USED ON GENIE



CABLE TRACKS					
	Outside dimensions mm	Inside dimensions mm	Material	Used on	REF
	116,5 x 35	102 x 26	Plastic	Z45/25-Z45/25J, Z45/25(J)/DC/BI-ENERGY, Z45/25IC POWER	127TA2444
	118 x 51	102,5 x 39	Plastic	Z-60/34, Z-45/25, Z-40/23 N, Z-51/30J, Z-45/25IC from serial n° 9996 to 99999	160TA9320
	131 x 76,4	116 x 47	Steel	S-80, S-60, Z-80/60, Z-135/70, ZX-135/70	161TA1813
	113 x 51	103 x 35	Steel	S-40	161TA1005
	115 x 26,5	102,5 x 26,5	Plastic	Z-34/22 IC, Z-30/20N, Z-34/22N	160TA8533
	116 x 35	102,5 x 26,5	Plastic	Z-51/30J	160TA9745
	116,5 x 35	102 x 26	Plastic	Z-34/22IC, Z-34/22N, Z-30/20N, Z-34/22 BI-ENERGY, Z-34/22, Z-45/25 BI-ENERGY, Z-34/22 IC, Z34/22 DC	161TA1530

BODY & CHASSIS PARTS

USED ON GENIE



BODY & CHASSIS PARTS

CABLE TRACKS					
	Outside dimensions mm	Inside dimensions mm	Material	Used on	REF
	117 x 35	102 x 27	Plastic	Z-60/34	160TA9595
	129 x 51	104,5 x 38	Plastic	Z-45/25IC from serial n° 9996 to 99999, Z-45/25, Z-40/23 N, Z-51/30J	160TA8506
	134 x 76,5	110 x 45,5	Plastic	S-80	160TA8843
	93,9 x 41,1	78,2 x 25,4	Plastic	Z-30/20N, Z-34/22N, Z-34/22, Z-34/22G, Z-34/22 IC	161TA1050
	116 x 35	102,5 x 26,5	Plastic	Z45/25IC-Z45/25J IC, Z51/30J, Z60/34, Z34/22N-Z34/22DC	127TA2446

REPAIR LINK



- Length: 435 mm
- Width: 118 mm

Used on Z-60/34, Z-45/25, Z-40/23 N, Z-51/30J, Z-45/25IC from serial n° 9996 to 99999

REF [160TA9347](#)

USED ON GENIE



RUBBER MOUNTS



- Pad
- Width: 51 mm
- Thread: 3/8" UNC
- Overall length: 129 mm

Used on Z-45/25, Z-40/23N, Z-25/8, Z-45/25IC from serial n° 9996 to 99999, S-100, S-120, Z-45/25DC from serial n° 9996 to 99999, S-3800, Z-45/25J, Z-40/23 N

REF [160TA9887](#)



- Pad
- Width: 51 mm
- Thread: 3/8" UNC
- Overall length: 129 mm

Used on Z-25/8, Z-30/20N, Z-40/23N, Z-34/22N, Z-45/25IC from serial n° 9996 to 99999, Z-45/25, Z-51/30J, Z-34/22 IC, Z34/22 DC, Z-34/22IC, Z-40/23 N, Z-33/18

REF [161TA1831](#)



- Cone shaped pad with thread
- Diameter: 27 mm
- Length: 31,8 mm
- Thread: 5/16" UNC
- Overall length: 53,5 mm

Used on S-80, Z-45/25IC from serial n° 9996 to 99999, S-40, S-60, TZ-50, TML-4000, Z-80/60, Z-135/70, Z-51/30J, Z-45/25, S-80X, GTH-844, ZX-135/70, Z-62/40, GTH-636, GS-2668RT

REF [161TA1438](#)



- Pad with central hole
- Diameter of the hole: 10,5 mm
- Diameter pad: 30,5 mm
- Overall length: 19,5 mm

Used on Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/25J, Z-45/25 BI-ENERGY, Z-45/25, Z-34/22N, Z-45/22IC, Z-45/22 MP, GS-2668RT, GS-2668

REF [161TA1404](#)



- Round plate for plaques
- Diameter: 16 mm
- Length: 17,5 mm
- Overall length: 63,5 mm

Used on S-60, S-40, Z-45/25IC from serial n° 9996 to 99999, S-80, Z-60/34, Z-80/60, Z-45/22, Z-45/25

REF [161TA1616](#)

USED ON GENIE



BODY & CHASSIS PARTS

DOOR HANDLES



- Length: 119 mm
- Width: 42 mm
- With knob left

Used on Z-40/23N, Z-30/20N, Z-45/25, GS-2032, GS-2046, GS-1530 from serial n° 00001 to 75999, Z-34/22, Z-34/22N, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-40/23 N, Z-33/18

REF [161TA1621](#)



- Length: 110 mm
- Grip range: 29 mm
- Non-locking

Used on S-120, S-100, Z-135/70, S-3800, ZX-135/70, SX-180

REF [160TA7802](#)



- Length: 70 mm
- Width: 43 mm
- Height: 26,5 mm

Used on GS-3390

REF [161TA1449](#)



- Length: 57 mm
- Width: 47 mm
- Height: 15 mm

Used on SX180, S40/45, S60/65, S80/85, S100/105, S120/125, S60/65(X)(XC)(HC)(TRAX), Z60/34, Z51/30J

REF [128TA3382](#)



- Length: 82 mm
- Width: 29 mm
- Height: 13,5 mm

Used on GS2669/3369/4069DC, GD2669/3369/4069R, GS1530/3246, GS30/32/46

REF [139TA1759](#)



- Length: 121 mm
- Width: 95 mm
- Height: 33,8 mm

Used on GS2032/3246, GS1530/1532/1930/1932, GS84/90, GS2646AV-AV35, GS3384, GTH1056

REF [139TA1836](#)



- Length: 124 mm
- Width: 120 mm
- Height: 65 mm
- Keys included

Used on S3800/3200, S40/45, S60/65, S80/85, S3800/3200, Z60/34

REF [128TA3384](#)



- Length: 42,9 mm
- Width: 28 mm
- Height: 8,1 mm

Used on GS84/90, GS3390/5390, GS2668/3268DC, GS3384, GS2668/3268RT

REF [127TA2748](#)

USED ON GENIE



BODY & CHASSIS PARTS

LATCHES



- Length: 76 mm
- Width: 46,5 mm
- With curved handle

Used on GR-12, RUNABOUT, TZ-34/20, GR-8, GRC-12, QS-12R, S-3800, TZ-50

REF [161TA1860](#)



- Length: 126 mm
- Width: 28,6 mm
- Rubber latch

Used on SX180, S60/65(X)(XC) (HC)(TRAX), S100/105, S120/125, Z51/30J, Z45/25(J), ZX135/70, Z45/25IC-Z45/25J IC

REF [128TA3385](#)



- Length: 115 mm
- Width: 33,5 mm
- Adjustable latch

Used on Z-30/20N, Z-45/25IC from serial n° 9996 to 99999, Z-45/22, Z-34/22N, Z-34/22, Z-45/25, Z-34/22 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-45/22DC, Z-45/25 BI-ENERGY, Z-51/30J, Z-45/22IC, Z34/22 DC, Z-45/22 MP, GS-2669BE

REF [151TA2361](#)

WEAR PADS

	Length mm	Material	Used on	REF
	127	Plastic	S-120, S-100, S-3800, S-80X	161TA1648
	134	Plastic	GS-3390, GS-3384	161TA5446
	140	Plastic	GS-2668 DC, GS-2668 RT, GS-2668DC, GS-2668RT, GS-2668	160TA9558
	168	Plastic/steel	Z-80/60, Z-135/70, ZX-135/70	160TA9588

USED ON GENIE



BODY & CHASSIS PARTS

WEAR PADS				
	Length mm	Material	Used on	REF
	178	Plastic/steel	S-120, S-100, S-3800	160TA9001
	178	Plastic/steel	S-120, S-100, Z-80/60, Z-135/70, S-3800, ZX-135/70	161TA1382
	64	Plastic	S-40, S-60, S-80	160TA7892
	77	Plastic/steel	S-80, S-60, S-40, S-120, S-100, S-3800, Z-45/25, Z-45/25J, Z-51/30J, Z-45/25IC from serial n° 9996 to 99999, S-80X, Z-62/40	161TA2062
	83	Plastic	GS-30, GS-1530 from serial n° 00001 to 75999	160TA9855
	83	Plastic	GS-30, GS-1530 from serial n° 00001 to 75999, GS-2646, GS-2032, GS-2046, GS-4047, GS-2646 AV	161TA1887
	127,8	Plastic	S40/45, S80/85, S60/65(X)(XC)(HC) (TRAX), Z51/30J, Z60/34, Z45/25(J), ZX135/70	127TA2762
	126,7	Plastic	S40/45, S80/85, S60/65(X)(XC)(HC) (TRAX), Z51/30J, Z60/34, Z45/25(J), ZX135/70	127TA2730

USED ON GENIE



COVERS & ACCESSORIES

PROTECTIVE COVERS



- Width: 605 mm
- Height: 1118 mm

Used on Z30/20N, Z34/22(N/DC/BI-ENERGY), Z30/20N(RJ)


REF [128TA3424](#)



- Width: 640 mm
- Height: 775 mm

Used on Z34/22(N/DC/BI-ENERGY), Z34/22IC, Z34/22N-Z34/22DC, Z34/22D,G,LPG

REF [139TA1838](#)

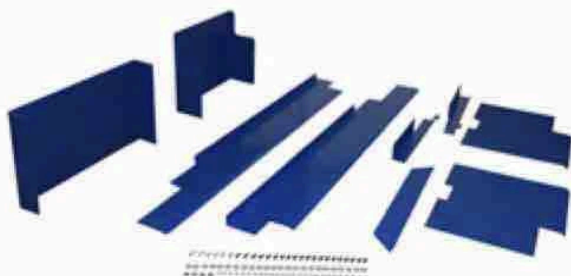

Kit linkguards

Used on GS-2668 DC, GS-2668 RT, GS-2668DC, GS-2668RT, GS-2668

REF [160TA7930](#)



- Length: 268 mm
- Width: 185 mm
- Height: 50 mm

Used on GS-3390, GS-2668 RT, GS-3384, GS-84, GS-2668RT, GS-2668

REF [161TA1431](#)



- Length: 630 mm
- Width: 400 mm
- Height: 965 mm

Used on Z-34/22N, Z-34/22, GS-30, GS-1530 from serial n° 00001 to 75999, Z34/22 DC

REF [160TA7790](#)



- Length: 960 mm
- Width: 640 mm
- Height: 400 mm

Used on Z34/22(N/DC/BI-ENERGY), Z34/22(N)

REF [160TA7924](#)

USED ON GENIE







COVERS & ACCESSORIES

GAS SPRINGS/SHOCK ABSORBERS				
	Force N	Centre distance mm	Used on	REF
Push type 	180	255	GRC-12, GR-12, QS-12R	161TA1521
	-1	510	Z-34/22N, Z-34/22IC, Z-34/22 BI-ENERGY, Z-60/34, Z-45/25 BI-ENERGY, Z-34/22 IC, Z34/22 DC, Z-34/22	161TA1855
	-1	715	Z-60/34	161TA1622
	108	310	GR-12, GR-8, CWP SUPER SERIES, AWP SUPER SERIES, IWP SUPER SERIES	145TA8896
	900	485	S-120, S-100, Z-135/70	160TA9521
	1200	545	S40/45, S60/65, S60/65(HC)TRAX, S80/85, S80X/85, GS2668/3268DC, GS2668/3268RT, GTH844	128TA3327
	1200	545	S40/45, S60/65, S60/65(X)(XC) (HC)TRAX, S80/85, S80X/80/85, GS2668/3268DC, GS2668/3268RT, GTH844	128TA3326

USED ON GENIE



GAS SPRINGS/SHOCK ABSORBERS				
	Force N	Centre distance mm	Used on	REF
	-1	300	GR12/15/20, IWP SUPER SERIES, AWP SUPER SERIES	128TA3328
	-1	900	Z45/22, S40, S40/45, S60	128TA3325
	250	1165	GS2668/3268DC, GS2668/3268RT	128TA3330
	8	360	GS2032/3246, GS1530/1532/1930/1932, GS30/32/46, GS2046/2646/32, GTH844	128TA3324

COVERS & ACCESSORIES

USED ON GENIE



DECALS

DECALS



- Length: 102 mm
- Height: 55 mm

Used on Z-30/20N, S-120, Z-60/34, Z-34/22N, Z-45/25IC from serial n° 9996 to 99999, Z-34/22IC, S-100, Z-45/25, Z-40/23N, S-80, TZ-50, S-60, Z-80/60, S-40, Z-135/70, Z-51/30J, Z-34/22, Z-34/22N DC, Z-45/25DC from serial n° 9996 to 99999, S-3800, Z-45/25J, Z-34/22 IC

REF [127TA1006](#)


- Length: 102 mm
- Height: 76,5 mm

Used on GS-1530 from serial n° 00001 to 75999, GS-30, GS-1530/32, GS-2032

REF [139TA3031](#)

- Length: 108 mm
- Height: 64 mm

Used on GS-1530 from serial n° 00001 to 75999, GS-30, GS-1530/32, GS-2032, GS-4047

REF [139TA3012](#)

- Length: 114 mm
- Height: 114 mm

Used on GS-1530/32, GS-3384, GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2668 DC, GS-2668 RT, GS-3268 RT, GS-2032, GS-3390, GS-84, S-120, GS-2668DC, GS-2646, GS2032, GS-2669 DC, GS-2669BE, GS-2668RT, GS-2669DC, GS-4047, GS-2668, GS-2646 AV, GS-4390, GS-2046 CE, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [126TA3819](#)

- Length: 121 mm
- Height: 57 mm

Used on GS-3384, GRC-12, GS-1530 from serial n° 00001 to 75999, GS-2046, S-120, GR-12, GS-30, Z-60/34, Z-34/22N, Z-45/25, Z-45/25IC from serial n° 9996 to 99999, S-100, Z-40/23N, S-80, Z-30/20N, Z-34/22IC, TZ-50, TZ-34/20, SUPERLIFT CONTRACTOR, GR-8, DPL-25S, GS-2668 RT, AWP SUPER SERIES, SUPERLIFT ADVANTAGE

REF [126TA4299](#)

USED ON GENIE



DECALS

DECALS



- Length: 126,5 mm
- Height: 76 mm

Used on GRC-12, GS-1530 from serial n° 00001 to 75999, GS-30, GR-12, QS-12R, GS-3384, GS-1530/32, GS-2669 DC, GS-2032, GS-2669BE, GS-2668RT, GS-2669DC, GS-4047, GS-2668

REF [139TA3013](#)


- Length: 139,2 mm
- Height: 76,3 mm

Used on S-120, Z-30/20N, Z-45/25IC from serial n° 9996 to 99999, S-80, Z-60/34, Z-34/22N, Z-45/25, S-100, Z-40/23N, Z-34/22IC, S-60, Z-80/60, S-40, Z-135/70, Z-51/30J, Z-34/22, Z-34/22N DC, Z-45/25DC from serial n° 9996 to 99999, S-3800, Z-45/25J, Z-34/22 IC, Z34/22 DC

REF [127TA1009](#)


- Length: 140 mm
- Height: 76 mm

Used on Z-30/20N, Z-34/22N, Z-40/23N, Z-34/22IC, Z-34/22, Z-34/22N DC, Z-60/34, Z-45/25, Z-80/60, S-40, S-60, Z-34/22 IC, Z-45/25IC from serial n° 9996 to 99999, Z34/22 DC, Z34/22, Z34/22 IC, S-120, S-100, S-80X, Z45/25, Z-40/23 N, Z-30/20, Z-34/22 BI-ENERGY, S-80

REF [127TA1007](#)

- Length: 140 mm
- Height: 77 mm

Used on GS-1530 from serial n° 00001 to 75999, GS-30, GS-2646, GS-1530/32, GS-2032, GS-2046, GS-4047, GS-2646 AV

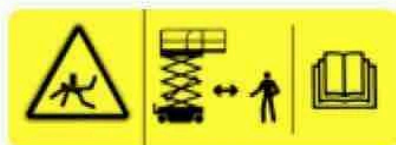REF [138TA3824](#)

- Length: 152 mm
- Height: 51 mm

Used on GS-3384, GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2668 RT, GS-2668 DC, GS-3390, GS-2032, GS-84, GS2032, GS-1530/32, GS-2669 DC, GS-2668DC, GS-2669BE, GS-2668RT, GS-2669DC, GS-4047, GS-2668, GS-2046 CE, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [126TA4300](#)

USED ON GENIE



DECALS


DECALS



- Length: 153 mm
- Height: 53 mm

Used on GS-3384, GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2668 RT, GS-2668 DC, GS-3390, GS-2032, GS-84, S-60, GS2032, GS-1530/32, GS-2669 DC, GS-2668DC, GS-2669BE, GS-2668, GS-2668RT, GS-2669DC, GS-4047, GS-2046 CE, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF 126TA4308

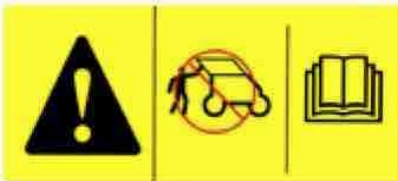

- Length: 178 mm
- Height: 76 mm

Used on GS-3384, Z-40/23N, GRC-12, GS-1530 from serial n° 00001 to 75999, S-120, S-100, Z-45/25IC from serial n° 9996 to 99999, Z-60/34, Z-34/22IC, Z-34/22N, S-80, Z-45/25, TZ-50, GS-2668 RT, GS-3390, S-60, Z-80/60, S-40, Z-135/70, Z-51/30J

REF 139TA1873



- Length: 134 mm
- Height: 75 mm

Used on Z30/20N, GR20/26J, Z34/22, Z30/20N, Z34/22(N/DC/BI-ENERGY), Z34/22IC, Z34/22N-Z34/22DC, Z34/34N DC POWER

REF 126TA3846 – Yellow

REF 126TA3848 – Blue



- Length: 170 mm
- Height: 170 mm

Used on S-80, S-120, Z-60/34, Z-45/22, Z-45/25IC from serial n° 9996 to 99999, S-40, Z-40/23N, S-100, Z-45/25, S-60, Z-80/60, Z-135/70, Z-51/30J, Z-45/25 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J BI-ENERGY from serial n° 9996 to 99999, S-3800, Z-45/22DC, Z-45/25J, Z-45/22IC, ZX-135/70, S-80X, Z45/25

REF 123TA4998 – Yellow

REF 123TA4978 – Blue



- Length: 137 mm
- Height: 108 mm

Used on Z30/20N, GR20/26J, Z34/22, Z30/20N, Z34/22(N/DC/BI-ENERGY), Z34/22IC, Z34/22N-Z34/22DC, Z34/34N DC POWER

REF 126TA3847 – Yellow

REF 126TA3844 – Blue

USED ON GENIE



DECALS

DECALS



- Length: 180 mm
- Height: 228 mm

Used on S-60, S-120, Z-45/25IC from serial n° 9996 to 99999, S-80, Z-45/22, S-40, Z-40/23N, S-100, Z-60/34, Z-45/25, Z-80/60, Z-135/70, Z-51/30J, Z-45/25 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J BI-ENERGY from serial n° 9996 to 99999, S-3800, Z-45/22DC, Z-45/25J, Z-45/22IC, ZX-135/70, S-80X, Z45/25


- REF 123TA5000** - Yellow
- REF 123TA4979** - Blue



- Length: 184 mm
- Height: 96 mm

Used on GRC-12, GS-1530 from serial n° 00001 to 75999, GS-2046, GR-12, Z-34/22N, GS-30, Z-45/25, Z-40/23N, Z-30/20N, TZ-50, TZ-34/20, GR-8, DPL-25S, AWP SUPER SERIES, GS-2668 DC, GS-2032, IWP SUPER SERIES, Z-34/22, Z-34/22N DC, Z-60/34, Z-135/70, Z-45/25DC from serial n° 9996 to 99999, GTH-1048, Z-80/60, GR-20J


REF 126TA4307

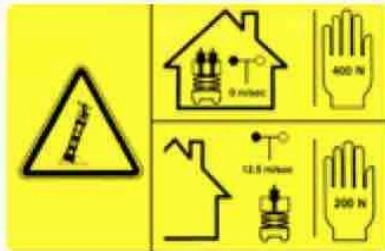

- Length: 185 mm
- Height: 120 mm

Used on GS-1530/32, GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2032, GS-2046 CE

REF 138TA3364

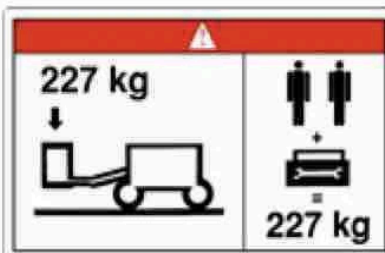

- Length: 203 mm
- Height: 127 mm

Used on S-120, Z-60/34, S-100, Z-45/25, Z-45/25IC from serial n° 9996 to 99999, S-80, S-60, Z-80/60, S-40, Z-51/30J, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-45/25 IC POWER, Z-51/30J IC, S-45, Z-45/25 J IC POWER, Z-45/25 DC, Z-45/25 BI-ENERGY

REF 126TA9891



- Length: 203 mm
- Height: 88 mm

Used on GS-30, GS-1530 from serial n° 00001 to 75999

REF 127TA1022

USED ON GENIE



DECALS

DECALS



- Length: 203 mm
- Height: 89 mm

Used on GS-3384, GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2668 RT, GS-2668 DC, GS-3390, GS-2032, GS-84, GS2032, GS-1530/32, GS-2669 DC, GS-2668DC, GS-2669BE, GS-2668, GS-2668RT, GS-2669DC, GS-4047, GS-2046 CE, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [126TA4301](#)



- Length: 32 mm
- Height: 41 mm

Used on GS-3384, GRC-12, GS-1530 from serial n° 00001 to 75999, GS-2046, GR-12, TMZ-34/19, GS-30, TMZ-50/30, TZ-50, TZ-34/20, GR-8, GS-2668 DC, GS-2668 RT, GS-3268 RT, GS-3390, GS-2032, TML-4000N, TML-4000, AWP SUPER SERIES, GS-84, GS-2668DC, GR-20J, QS-12R, GS-2646, GS2032, GS-1530/32, GS-2669 DC

REF [126TA3837](#)



- Length: 44 mm
- Height: 19 mm

Used on GS-3384, Z-30/20N, GRC-12, GS-1530 from serial n° 00001 to 75999, Z-45/25, Z34/22 DC, GS-2046, S-120, GR-8, GR-12, TMZ-34/19, Z-45/25IC from serial n° 9996 to 99999, S-100, Z-60/34, Z-34/22N, GS-30, Z-40/23N, TZ-50, TMZ-50/30, Z-34/22IC, RUNABOUT, S-80, S-40, TZ-34/20


REF [126TA4169](#)



- Length: 50 mm
- Height: 203 mm

Used on GS-2046, GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032, GS-2646, GS2032, GS-2046 CE

REF [126TA4298](#)



- Length: 50,5 mm
- Height: 64 mm

Used on GS-2046, GS-30, GS-1530 from serial n° 00001 to 75999, GS-2032, GS2032, GS-2046 CE


REF [126TA4306](#)

USED ON GENIE



DECALS

DECALS

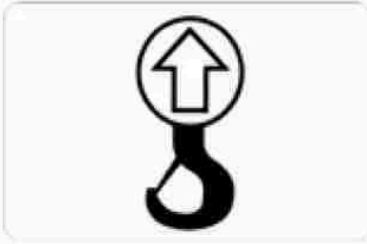


- Length: 51 mm
- Height: 32 mm

Used on GS-1530 from serial n° 00001 to 75999, GR-12, RUNABOUT, GR-8, AWP SUPER SERIES, IWP SUPER SERIES, GS-30, GR-20J, GRC-12, QS-12R, GS-2646, GS-1530/32, GS-2669 DC, GS-2032, ZX-135/70, GS-2668, GS-2669BE, Z-45/25, AWP-15S, Z-51/30J, Z-33/18, Z-62/40, GS-2046, GS-2668RT, SX-180, GS-2668DC, GS-2669DC, GS-4047, GS-2646 AV

REF [161TA1228](#)

- Length: 63,5 mm
- Height: 76,5 mm

Used on GS-2046, GS-30, GS-1530 from serial n° 00001 to 75999, GS-1530/32, GS-2032, GS-2046 CE

REF [139TA1874](#)

- Length: 51 mm
- Height: 76 mm

Used on GS-1530 from serial n° 00001 to 75999, GS-30, GS-1530/32

REF [138TA3423](#)

- Length: 70 mm
- Height: 32 mm

Used on GS-1530 from serial n° 00001 to 75999, GS-2046, GS-30, GS-2668 DC, GS-2032, GS2032, GS-1530/32, GS-2668DC, GS-4047, GS-2046 CE

REF [126TA4305](#)

- Length: 76 mm
- Height: 126 mm

Used on GS-3384, GS-1530 from serial n° 00001 to 75999, TZ-50, TZ-34/20, GS-2668 RT, GS-3390, GS-30, IWP SUPER SERIES, GS-84, GS-1530/32, GS-2669 DC, GS-2032, GS-2669BE, GS-2668, GS-2668RT, GS-2669DC, TZ34/20, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [138TA3619](#)

USED ON GENIE



DECALS

DECALS



- Length: 76 mm
- Height: 127 mm

Used on GS-3384, GS-1530/32, GS-1530 from serial n° 00001 to 75999, GS2032, GS-2046, GS-30, TZ-50, TZ-34/20, GS-2668 RT, GS-2668 DC, GS-3390, GS-2032, GS-84, GTH-1048, GTH-1056, GS-2669 DC, GS-2668DC, GS-2669BE, GTH-844, GS-2668RT, GTH-636, GS-2669DC, GS-4047, GS-2668, TZ34/20, GS-2046 CE, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [126TA4309](#)



- Length: 76 mm
- Height: 127 mm

Used on Z-30/20N, GRC-12, S-120, Z-60/34, Z-45/25IC from serial n° 9996 to 99999, Z-34/22N, Z-34/22IC, S-100, GS-30, Z-40/23N, S-80, Z-45/25, TZ-50, TZ-34/20, GR-8, GS-1530 from serial n° 00001 to 75999, GS-2032, S-60, Z-80/60, S-40, Z-135/70, Z-51/30J, Z-34/22

REF [127TA1005](#)



- Length: 95 mm
- Height: 195 mm

Used on GRC-12, GS-2046, GR-12, GS-30, GS-2668 DC, GS-1530 from serial n° 00001 to 75999, GS-2032, QS-12R, GS-2646, GS-2668DC, GS-2046 CE

REF [139TA1887](#)



- Length: 100 mm
- Height: 91 mm

Used on GS-1530 from serial n° 00001 to 75999, GR-12, GS-1530/32, GS-2032, QS-12R, GRC-12, GS-4047, GS-2646 AV

REF [161TA2125](#)



- Length: 100 mm
- Height: 91 mm

Used on GR-12, QS-12R, GRC-12, GS-1530, GS-2032, GS-4047, GS-2646 AV

REF [161TA5141](#)



- Length: 100 mm
- Height: 91 mm

Used on GS2269, GS3369, GS4069DC

REF [161TA2921](#)

USED ON GENIE



DECALS


DECALS



- Length: 682 mm
- Height: 225 mm

Used on S-60


REF [139TA1872](#)

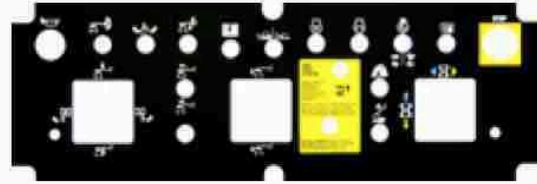

- Length: 685 mm
- Height: 227 mm

Used on Z-60/34, Z-45/25IC from serial n° 9996 to 99999, Z-51/30J, Z-45/25, Z45/25, Z-45/25 IC POWER, Z-51/30J IC, Z-45/25 J IC POWER


REF [126TA9869](#)

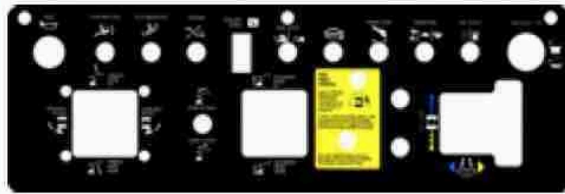

- Length: 680 mm
- Height: 220 mm

Used on Z60/34, Z45/25(IC POWER), Z45/25(J), Z45/25IC-Z45/25J IC

REF [126TA4180](#)

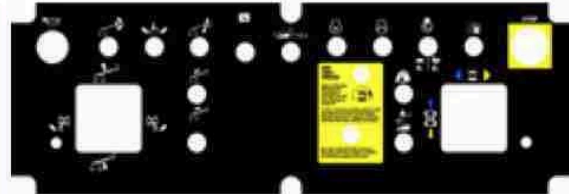

- Length: 685 mm
- Height: 225 mm

Used on S40/45, Z34/22 BI-ENERGY POWER

REF [138TA2875](#)



- Length: 145 mm
- Height: 145 mm

Used on GS1530/1930, S2046/2646/32, GS2032/2632

REF [126TA4191](#)



- Length: 145 mm
- Height: 195 mm

Used on GS3384, GS2668/3268RT, GS3384, GS4390/5390


REF [161TA1891](#)



- Length: 145 mm
- Height: 145 mm

Used on GS30/32/46, GS1530/1930, GS2668/3268DC

REF [126TA9746](#)



- Length: 146 mm
- Height: 225 mm

Used on GS-3384, GS-3390, GS-2668 RT, GS-84, GS-2668, GS-2668RT, GS-2668 RT CE, GS-3384 CE, GS-3268 RT CE

REF [161TA2153](#)

USED ON GENIE



DECALS


DECALS



- Length: 147 mm
- Height: 228 mm

Used on GS-2668RT


REF [160TA7928](#)



- Length: 386 mm
- Height: 232 mm

Used on Z30/20N, Z34/22(N/DC/BI-ENERGY), Z34/22N-Z34/22DC, Z34/22N, Z34/34N DC POWER


REF [127TA1014](#)

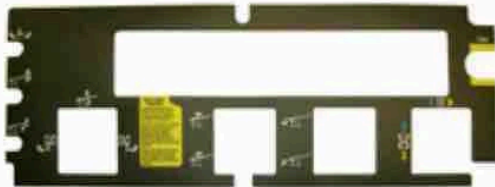

- Length: 645 mm
- Height: 228 mm

Used on Z80/60

REF [138TA2368](#)

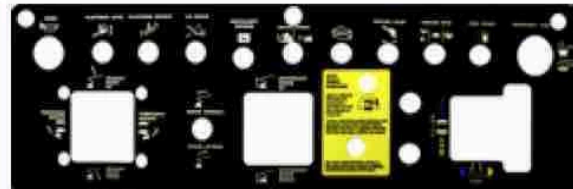

- Length: 685 mm
- Height: 220 mm

Used on Z60/34, Z45/25(IC POWER), Z45/25(J), Z45/25IC-Z45/25J IC

REF [138TA3116](#)




- Length: 102 mm
- Height: 102 mm

REF [123TA5131](#)




- Length: 102 mm
- Height: 64 mm

REF [123TA5211](#)



- Length: 102 mm
- Height: 102 mm

REF [126TA3808](#)

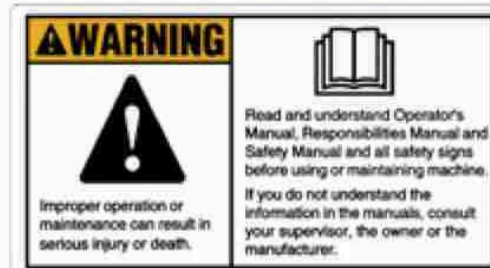

- Length: 124 mm
- Height: 70 mm

REF [123TA5299](#)

USED ON GENIE



DECALS

DECALS



- Length: 248 mm
- Height: 133 mm

REF [126TA3866](#)



- Length: 203 mm
- Height: 330 mm

REF [165TA3891](#)



- Length: 178 mm
- Height: 330 mm

REF [165TA3890](#)



- Length: 202 mm
- Height: 103 mm

REF [123TA5205](#)