

# USED ON GENIE



ENGINE PARTS

## EXHAUST PIPES



- Length: 250 mm
- Outer diameter smallest tube: 51 mm
- Outer diameter biggest tube: 63 mm

Used on S-80, S-120, Z-135/70, S-100, Z-80/60, S-60, S-3800, ZX-135/70, S-80X, Z-62/40, SX-180

**REF [134TA6174](#)**



- Length: 375 mm
- Outer diameter smallest tube: 48 mm
- Outer diameter biggest tube: 48 mm

Used on Z-45/25IC from serial n° 9996 to 99999, Z-51/30J, Z-45/25

**REF [134TA6016](#)**



- Length: 75 mm
- Outer diameter smallest tube: 125 mm
- Outer diameter biggest tube: 125 mm

Used on S-80, S-60, Z-135/70, S-100, S-120, Z-80/60, S-3800, ZX-135/70, S-80X, Z-45/25, Z-51/30J

**REF [134TA6035](#)**



- Length: 245 mm
- Outer diameter smallest tube: 35 mm
- Outer diameter biggest tube: 48 mm

**REF [161TA1588](#)**

## USED ON GENIE



## ENGINE PARTS

## MUFFLERS



- Length of the muffler: 435 mm
- Diameter body: 218 mm
- Outer diameter smallest tube: 67 mm
- Outer diameter biggest tube: 67 mm

Used on S-120, S-80, S-100, Z-135/70, Z-80/60, S-60, S-3800, ZX-135/70, S-80X, Z-62/40, SX-180

**REF [161TA4391](#)**



- Gasket for muffler
- Length: 68 mm
- Diameter: 36 mm
- Material: metal

Used on GS2669/3369/4069R, GS2668/3268RT, Z45/22MP, Z34/22IC, Z34/22(N/DC/BI-ENERGY)

**REF [128TA3234](#)**

# USED ON GENIE



ENGINE PARTS

## FILLER CAPS



- Height: 27,5 mm
- Outer diameter: 73 mm
- Inner diameter: 38 mm

Used on S-40, Z-60/34, S-80, Z-34/22IC, Z-45/22, S-60, GS-3384, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP

**REF [160TA6735](#)**



- Height: 35 mm
- Outer diameter: 68 mm
- Inner diameter: 40 mm

Used on S-40, GS-3390, Z-60/34, Z-34/22IC, S-80, Z-45/25IC from serial n° 9996 to 99999, GS-2668 RT, S-60, GS-3384, GS-84, Z-80/60, Z-45/25, Z-34/22 IC, GS-2668RT, GS-2668

**REF [161TA1495](#)**



- Height: 57,2 mm
- Outer diameter: 74 mm
- Inner diameter: 45 mm

Used on S-40, S-60, Z-60/34, Z-80/60, GS-84, Z-45/25, Z-45/25IC from serial n° 9996 to 99999, S-80X, Z-34/22 IC, Z-62/40, GS-2668RT, GS-3384

**REF [160TA5553](#)**



- Height: 57,3 mm
- Outer diameter: 74 mm
- Inner diameter: 45 mm

Used on GS-2669BE, GS-2668RT

**REF [160TA9011](#)**

# USED ON GENIE



ENGINE PARTS

## HAND PRIMER PUMP



- Manual pump with plastic connections
- Total height: 43 mm

Used on Z-34/22IC, Z-45/25IC from serial n° 9996 to 99999, GS-2668 RT, TML-4000, Z-34/22 IC, S-60, S-40, Z-45/25, Z-62/40, GS-2668RT, GS-2668

REF [160TA6128](#)

## FUEL PUMPS

	Total height mm	Centre distance mm	Number of holes	Used on	REF
	76,0	36,0	2	Z-45/25, Z-34/22N, Z-34/22 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC, Z-34/22	<a href="#">160TA6129</a>
	79,0	44,5	4	S-80, S-40, S-60, Z-80/60	<a href="#">160TA6631</a>
	83,0	73,0	2	S-80, GS-84, Z-60/34, Z-135/70, S-100, S-120, S-40, S-60, S-3800, Z-80/60, ZX-135/70, S-80X, Z-62/40, GS-3390, SX-180, GS-3384	<a href="#">160TA3921</a>
	90,0	36,0	2	Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668	<a href="#">152TA3228</a>
	95,5	53,5	3	S-80, S-120, S-100, Z-80/60	<a href="#">106TA6420</a>
	128,5	72,5	2	S80/85, S60/65, S40/45, S60, S40, Z60/34	<a href="#">151TA2354</a>



## USED ON GENIE



ENGINE PARTS

## INJECTION PUMP DIESEL



Used on Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G,  
Z-34/22 IC, GS-2668RT, GS-2668

REF [160TA9571](#)

## MOTOR - COIL ENGINE STOPS

	Voltage V	Type of current	Function	Mounting side	Length mm	REF
	12	DC	Pull	Both sides	59,7	<a href="#">151TA2362</a>
	12	DC	Push	Both sides	68,5	<a href="#">128TA3245</a>
	12	DC	Push	Both sides	68,5	<a href="#">151TA2997</a>
	12	DC	Pull	Both sides	71,0	<a href="#">128TA3249</a>
	12	DC	Pull	Both sides	71,0	<a href="#">128TA3248</a>
	12	DC	Pull	Without	88,0	<a href="#">160TA6736</a>

## USED ON GENIE



ENGINE PARTS

MOTOR - COIL ENGINE STOPS						
	Voltage V	Type of current	Function	Mounting side	Length mm	REF
	12	DC	Pull	Left side	97,0	<a href="#">161TA1510</a>
	12	DC	Pull	Both sides	153,3	<a href="#">122TA7877</a>
	12	DC	Pull	Both sides	159,5	<a href="#">139TA5150</a>
	12	DC	Pull	Both sides	161,0	<a href="#">122TA7878</a>
	12	DC	Pull	Both sides	162,0	<a href="#">135TA2505</a>
	12	DC	Pull	Both sides	162,0	<a href="#">161TA2029</a>
	12	DC	Pull	Both sides	162,5	<a href="#">161TA1774</a>
	12	DC	Pull	Both sides	196,0	<a href="#">128TA3247</a>
	12	DC	Pull	Both sides	196,0	<a href="#">122TA7879</a>

# USED ON GENIE



ENGINE PARTS

## SHUTDOWN KIT



- Shutdown kit
- Voltage: 12 VDC
- Length: 133 mm

Used on Z-45/22, Z-45/22IC

REF [160TA8447](#)

## OIL DIPSTICKS



- Length: 503 mm
- Diameter: 10 mm

Used on Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668

REF [160TA7686](#)



- Length: 280 mm
- Diameter: 12,5 mm

Used on S-60, S-40, Z-60/34, GS-84, Z-51/30J, Z-45/25, Z-45/25IC from serial n° 9996 to 99999, Z-62/40, GS-3390, GS-3384

REF [160TA9835](#)



- Length: 292 mm
- Diameter: 12,7 mm

Used on GS-3390, S-80, S-40, GS-3384, Z-45/22, Z-45/25, S-60, S-120, S-100, S-3800, Z-60/34, GS-84, Z-80/60, Z-135/70, ZX-135/70, S-80X, Z-62/40, SX-180

REF [160TA2706](#)

# USED ON GENIE



ENGINE PARTS

## RADIATORS



- Length: 415 mm
- Width: 60 mm
- Height: 450 mm
- Without oil cooler

Used on Z-34/22IC, GS-2668 RT, Z-34/22 IC, GS-2668RT, GS-2668

REF [161TA1767](#)



- Length: 335 mm
- Width: 67 mm
- Height: 260 mm
- Type oil cooler: radiator

Used on GS2669/3369/4069R, SX180, S40/45, S100/105, S120/125, GS84/90, S60/65(X)(XC)(HC)(TRAX), GS3384, GS2668/3268RT, S60/65(HC)TRAX

REF [139TA1859](#)

## RADIATOR CAP



- 14 psi
- Length: 49 mm
- Width: 15 mm
- Height: 29,5 mm


Used on Z-45/25, Z-34/22N, Z-34/22 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC

REF [106TA4437](#)

## USED ON GENIE




## THERMOSTATS



- Outer diameter (D1): 43,6 mm
- Height engine side (H2): 19,4 mm
- Height radiator side (H3): 18 mm
- Opening temperature: 71 °C

Used on Z-34/22 IC, GS-2668 RT, GS-2668RT, GS-2668

**REF [152TA7167](#)**



- Outer diameter (D1): 38 mm
- Height engine side (H2): 45,5 mm
- Height radiator side (H3): 16,5 mm
- Opening temperature: 71 °C

**REF [128TA3260](#)**

## WATER PUMPS



- Sort of water pump: flange
- Total height: 110 mm
- Maximum length: 184 mm
- Gasket included: yes

Used on Z-34/22IC, Z-34/22 IC,  
GS-2668 RT, GS-2668,  
GS-2668RT

**REF [141TA2035](#)**



- Sort of water pump: flange
- Total height: 109 mm
- Maximum length: 183 mm
- Gasket included: yes

Used on Z-45/22, Z-34/22IC,  
GS-2668 RT, Z-34/22, Z-34/22G,  
Z-34/22 IC, Z-45/22 MP,  
GS-2668RT, GS-2668

**REF [141TA9021](#)**



- Sort of water pump: flange
- Total height: 84 mm
- Maximum length: 159 mm
- Gasket included: no

Used on Z-45/25, Z-34/22N,  
Z-34/22 BI-ENERGY, Z-45/25DC  
from serial n° 9996 to 99999,  
Z-45/25J, Z34/22 DC, Z-34/22

**REF [141TA9032](#)**



# USED ON GENIE



## ENGINE PARTS

### RUBBER HOSES PREFORMED

	Kind of hose	Number of curves	Minimum length mm	Inner diameter mm	Used on	REF
	Air hose	2	480	68	Z-45/25IC from serial n° 9996 to 99999, S-60, S-40, Z-51/30J, Z-45/25, Z-62/40	<a href="#">160TA6084</a>
	Water hose	1	45	9	Z-34/22N, Z-45/22, Z-34/22IC, Z-34/22 BI-ENERGY, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/25 BI-ENERGY, Z34/22 DC, Z-45/22 MP, GS-2668RT, GS-2668	<a href="#">160TA8979</a>
	Water hose	2	136	27	Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668	<a href="#">160TA8233</a>
	Water hose	2	64	26	GS-2668 RT, GS-2668RT, GS-2668	<a href="#">160TA6732</a>
	Water hose	1	80	22	Z-45/22, Z-45/25, Z-34/22IC, Z-34/22N, Z-34/22 BI-ENERGY, GS-2668 RT, Z-34/22, Z-34/22G, Z-45/25DC from serial n° 9996 to 99999, Z-34/22 IC, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC, Z-45/22 MP, GS-2668RT, GS-2668	<a href="#">160TA9486</a>

### GASKET VALVE COVER



- Thickness: 5,2 mm
- Material: rubber

Used on Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668

REF [161TA4375](#)

# USED ON GENIE



## SPARK PLUG




- Number of ground electrodes: 1
- Thread: M14
- Pitch: 1,25 mm
- Length: 76 mm
- RH/LH thread: RH

Used on GS-3390, S-40, S-80, Z-60/34, S-60, GS-3384, Z-45/22, Z-45/25IC from serial n° 9996 to 99999, Z-45/25, Z-45/22IC

REF [161TA1576](#)


## GLOW PLUGS

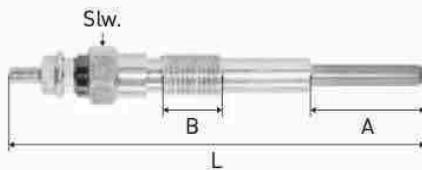

- Type: sheathed glow plug
- Voltage: 11 V
- Thread (Slw): M8
- Total length: 76 mm
- Length A: 19 mm
- Length B: 12 mm

Used on Z-45/25, Z-34/22 BI-ENERGY, Z-34/22N, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC, Z-34/22IC, GS-2668 RT, Z-34/22 IC, Z-34/22, GS-2668RT, GS-2668

REF [106TA8406](#)

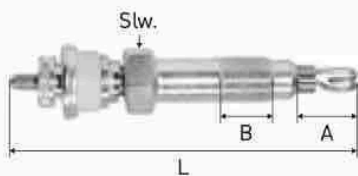

- Type: wire glow plug
- Voltage: 11 V
- Thread (Slw): M22
- Total length: 89 mm
- Length A: 52 mm
- Length B: 7 mm

Used on GS-3390, S-40, Z-60/34, Z-45/25IC from serial n° 9996 to 99999, S-60, Z-45/25, S-80, GS-3384, Z-51/30J, Z-45/22, GS-84, Z-62/40

REF [160TA9751](#)

## VAPORISER, REGULATOR



Used on Z-60/34, S-80, S-40, S-60, Z-45/22, Z-45/22IC

REF [107TA9102](#)

# USED ON GENIE



## ENGINE PARTS

### EXHAUST MANIFOLD



Holes diameter: 4 x M8 x  
1,25 mm/3 x 26 mm

Used on Z-45/22, Z-34/22IC,  
GS-2668 RT, Z-34/22, Z-34/22G,  
Z-34/22 IC, Z-45/22 MP,  
GS-2668RT, GS-2668

**REF [161TA1053](#)**

### SPARK ARRESTOR



Diameter: 127 mm

Used on Z-45/22, Z-34/22IC,  
Z-34/22N, Z-34/22 BI-ENERGY,  
Z-34/22, Z-45/22D, Z-34/22G,  
Z-34/22 IC, Z-45/25  
BI-ENERGY, Z34/22 DC,  
Z-45/22 MP

**REF [139TA1786](#)**

### ALTERNATORS



· Voltage: 110 V  
· Current: 30 A

Used on S-100, Z-45/25IC from  
serial n° 9996 to 99999, S-80,  
S-60, S-120, Z-135/70, Z-80/60,  
Z-51/30J, Z-45/25, ZX-135/70,  
S-80X

**REF [161TA1962](#)**



· Voltage: 12 V  
· Current: 45 A

Used on Z-45/22, Z-34/22IC,  
GS-2668 RT, Z-34/22, Z-34/22G,  
Z-34/22 IC, Z-45/22 MP,  
GS-2668RT, GS-2668

**REF [152TA4093](#)**



· Voltage: 12 V  
· Current: 55 A

Used on S-80, S-120, S-100,  
Z-80/60

**REF [160TA8390](#)**



· Voltage: 12 V  
· Current: 60 A

Used on GS-3390, S-40,  
Z-45/25IC from serial n°  
9996 to 99999, S-80, S-60,  
GS-3384, Z-60/34, Z-51/30J,  
Z-45/22, GS-84, Z-45/25,  
Z-62/40

**REF [151TA2355](#)**



· Voltage: 12 V  
· Current: 65 A

Used on S-80, S-40, S-60,  
Z-80/60

**REF [103TA3755](#)**



· Voltage: 12 V  
· Current: 85 A

Used on Z-60/34, Z-45/25IC  
from serial n° 9996 to 99999,  
S-60, S-40, Z-45/25, Z-62/40

**REF [165TA3880](#)**

# USED ON GENIE



ENGINE PARTS

## ALTERNATORS



- Voltage: 12 V
- Current: 80 A

Used on S-80, Z-135/70, S-100, S-120, Z-80/60, S-60, S-3800, ZX-135/70, S-80X, Z-62/40, SX-180

**REF [161TA1666](#)**



- Voltage: 12 V
- Current: 85 A

Used on S-120, S-100, Z-135/70, GTH-1048, GTH-1056, ZX-135/70, GTH-844, SX-180

**REF [161TA2371](#)**



- Voltage: 48 V
- Current: 100 A

Used on Z-34/22N, Z-45/25, Z-34/22 BI-ENERGY, Z-45/25J, Z-45/25 BI-ENERGY, Z-45/25DC from serial n° 9996 to 99999, Z34/22 DC, Z-34/22

**REF [161TA1917](#)**

## STARTERS



- Voltage: 12 V
- Power: 0,8 kW
- Number of teeth: 9

Used on Z-45/22, Z-34/22IC, Z-34/22, GS-2668 RT, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668

**REF [152TA4552](#)**



- Voltage: 12 V
- Power: 1 kW
- Number of teeth: 9

Used on Z-34/22IC, GS-2668 RT, Z-34/22 IC, GS-2668RT, GS-2668

**REF [103TA3220](#)**



- Voltage: 12 V
- Power: 1,4 kW
- Number of teeth: 10

Used on GS-3390, S-80, S-40, Z-45/25IC from serial n° 9996 to 99999, Z-60/34, S-60, GS-3384, Z-45/22, GS-84, Z-80/60, Z-45/25, Z-45/22IC

**REF [103TA3390](#)**



- Voltage: 12 V
- Power: 0,8 kW
- Number of teeth: 9

Used on Z34/22(N/DC/BI-ENERGY), Z34/22 BI-ENERGY, Z45/25(J)

**REF [135TA5446](#)**



# USED ON GENIE



## ENGINE PARTS

### STARTERS



- Voltage: 12 V
- Power: 2 kW
- Number of teeth: 9

Used on Z-45/25IC from serial n° 9996 to 99999, Z-60/34, S-60, S-40, Z-45/25

**REF [160TA3315](#)**



- Voltage: 12 V
- Power: 2,6 kW
- Number of teeth: 9

Used on S-60, S-40, S-120, S-80, S-100, S-3800, Z-60/34, GS-3384, Z-45/25, GS-84, Z-80/60, Z-135/70, Z-51/30J, Z-45/25IC from serial n° 9996 to 99999, GS-3390, ZX-135/70, S-80X, GTH-5519, GTH-3007FMS, GTH-3007, GTH-2506, Z-62/40, SX-180

**REF [135TA5465](#)**



- Voltage: 12 V
- Power: 2,1 kW
- Number of teeth: 10

Used on S-80, S-40, S-60, Z-80/60

**REF [103TA3314](#)**



- Voltage: 12 V
- Power: 3,2 kW
- Number of teeth: 10

Used on S-120, S-100, Z-135/70, GTH-1048, GTH-1056, ZX-135/70, GTH-844, SX-180

**REF [152TA9307](#)**



- Voltage: 12 V
- Power: 3,9 kW
- Number of teeth: 10

Used on S-120, S-100

**REF [103TA3143](#)**



- Voltage: 12 V
- Power: 3,2 kW
- Number of teeth: 11

Used on S40/45, GS3384, GS3390/4390/53, Z60/34, Z51/30J, Z45/25(IC POWER), Z45/22, Z45/25Z-Z45/25J


**REF [144TA9229](#)**



## USED ON GENIE



## V-BELTS



## Type of belt



La mm	Li mm	H1 mm	B2 mm	Type of belt	Used on	REF
723	672	8	9	COG	Z34/22(N/DC/BI-ENERGY), Z34/22 BI-ENERGY	<a href="#">128TA3241</a>
850	795	8,7	9	COG	Z45/25(J/DC/BI-ENERGY), Z45/25(J)	<a href="#">128TA3243</a>
875	827	7,7	9,8	COG	Z-45/25, Z-34/22N, Z-34/22 BI-ENERGY, GS-2668 RT, Z-45/25DC from serial n° 9996 to 99999, Z-45/25J, Z-45/25 BI-ENERGY, Z34/22 DC, TML-4000N, TML-4000, Z-34/22, GS-2668RT, GS-2668	<a href="#">106TA9056</a>
890	850	9	13	COG	S-100, S-60, S-120, Z-135/70, ZX-135/70	<a href="#">106TA9082</a>
950	843	7,5	10	COG	Z-45/22, Z-34/22IC, GS-2668 RT, Z-34/22, Z-34/22G, Z-34/22 IC, Z-45/22 MP, GS-2668RT, GS-2668	<a href="#">106TA9059</a>
1020	971	8,7	13,3	COG	Z-60/34, S-40, S-60, Z-45/25	<a href="#">106TA9087</a>
1065	1022	8	13,3	PLAIN	Z-45/22, Z-45/22IC	<a href="#">160TA7031</a>
1100	1087	7,5	9,4	WRA	S-80, S-120, S-100, Z-80/60	<a href="#">106TA9065</a>
1125	1075	8,1	10,1	COG	Z-45/25, Z-60/34, S-80, S-60, GS-3390, S-40, Z-45/25IC from serial n° 9996 to 99999, GS-3384, Z-51/30J, Z-45/22, GS-84, Z-135/70, S-120, S-100, Z-80/60, GTH-3512SX, Z-62/40	<a href="#">106TA9066</a>
1150	1100	8,1	10,2	COG	S-80, S-120, S-100, Z-80/60, Z-135/70	<a href="#">106TA9067</a>
1185	1140	8,5	10	COG	S-120, S-80, S-60, S-100, S-3800, Z-80/60, ZX-135/70, S-80X, Z-135/70, Z-62/40, SX-180	<a href="#">161TA1473</a>
1070		4,25	21,45	PK	S40/45, S60/65 (HC)TRAX, S60/65, GS3390/4390/53, GS3384, Z60/34, Z45/25(IC POWER)	<a href="#">128TA3244</a>

## USED ON GENIE



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
<b>Air filters</b>					
	170	60,7	400	S40/45, S60, S60/65, S80/85, Z45/22, Z45/25(IC POWER), Z45/25-Z45/25J IC POWER	<a href="#">139TA1706</a>
	121	77,0	324	GTH5519/5519S, GTH2506, GTH3007/AGRI730, GTH2506/AGRI625, GTH2506 AU2	<a href="#">138TA7351</a>
	164	86,0	210	Z60/34, S60, GS3384, GS3390/4390/53, Z60/34, Z45/22, GS3384	<a href="#">165TA3881</a>
	104	63,0	264	GS2668/3268RT, Z45/22MP, Z34/22IC, Z45/22, Z34/22IC POWER	<a href="#">127TA1048</a>
<b>Oil filters</b>					
	76,0	17,4	88	GTH2506 III A/B, GTH5519, GTH5519/5519S, GTH2506, GTH4010, GTH6622, GTH3007 AG AU, GTH3007/AGRI730, GTH3007, GTH2506/AGRI625, SX180, GTH1056, S40/45, S100/105, S120/125, GS84/90	<a href="#">139TA7866</a>
	68,5	18,5	85	GS2669/3369/4069R, GS2668/3268RT, Z34/22IC, Z34/22IC POWER, Z34IC	<a href="#">164TA1069</a>
	93,5	17,4	180	SX180, S100/105, S120/125, ZX135/70, Z135/70, GTH644/844, GTH1056, GTH644/842/8, GTH1048/1056, GTH4013EX/4017, GTH4017EX/4514EX	<a href="#">127TA2848</a>
	56,5	25,0	170	GS2669/3369/4069DC, GS2669/3369/4069R, SX180, S40/45, S60/65, S80/85, S100/105, S120/125, S3800/3200, GS84/90, S60/65(X) [XC][HC][TRAX], Z51/30J, Z60/34, Z45/25[J]	<a href="#">127TA1930</a>
	44,5	24,0	202	S40/45, S60/65, S80/85, S60, Z60/34, Z34/22IC, Z45/25(IC POWER)	<a href="#">165TA3882</a>

## USED ON GENIE



FILTERS

FILTERS					
	Outer diameter mm	Inner diameter mm	Height mm	Used on	REF
	94,0	23,2	135	GS2032/3346, GS1530/3246, GS2046/2646/32, GS1530/1930, GS4047, GRC12, QS12/15/20(R)(W)	<a href="#">165TA3883</a>
	76,0	56,5	260	100SC2/120SC2/140SC2, GS2669/3369/4069R, SX180, S100/105, S120/125, S3800/3200, S60/65(X)(XC)(HC) (TRAX), Z45/25(J), Z51/30J, ZX135/70	<a href="#">127TA1953</a>
	95,0	93,0	186	TMZ50/30, GS2032/2632, GS1530/1930, GS2046/2646/32, GS2032, Z25/8-Z20/8(N)	<a href="#">165TA3884</a>
	100	71,0	286	S60/65(X)(XC)(HC)(TRAX), S80X/S80/S85Z51/30J, Z45/25(J), Z45/25IC-Z45/25J IC	<a href="#">165TA3885</a>
	249	89,5	76	SX135XC, SX105/125XC, S40, S80/85, Z45/22, Z34/22IC POWER	<a href="#">127TA1931</a>
<b>Fuel filters</b>					
	51,0	77,5	16,5	SG2669/3369/4069R, S40/45, S80/85, GS2668/3268RT, Z34/2IC, Z80/60	<a href="#">165TA3886</a>
	79,0	14,5	164	GTH5519(S), GTH4010, GTH6622, GTH3007/AGRI730, GTH2056/AGRI625, GTH3007	<a href="#">165TA3887</a>
	77,0	16,5	60	GS2269/3369/4069R, GS2668/3268RT, S60/65, A34/22IC POWER, Z34/22IC	<a href="#">165TA3888</a>
	76,0	29,6	158,5	GTH4013EX/4017, GTH4515 AU, GTH4017 AU, GTH3713, GTH4016SR/4018SR, GTH644/842/8, SX180, ZX135/70, Z100/105, Z120/125, Z135/70	<a href="#">138TA7352</a>