



INDICATOR LIGHTS

INDICATOR LIGHTS



INDICATOR LIGHTS

NICE TO KNOW – INDICATOR LIGHTS



Indicator lights increase the safety: they warn the environment for the direction of movement of the vehicle and draw the attention on any terrain.


Indicator lights are available in different shapes, sizes and dimensions. We can also supply combination lights with indicator lights and a continuously lit marker light. In addition, there are also 'two-sided illumination' indicator lights.

INDICATOR LIGHTS



BUILT-IN TURN SIGNAL LIGHTS

- REF 151TA4008** – 12V LH
REF 151TA4009 – 12V RH
- Technology: LED
 - Wire length: 315 mm
 - Built-in
 - Used for Hyster and Yale
 - Connector: H3

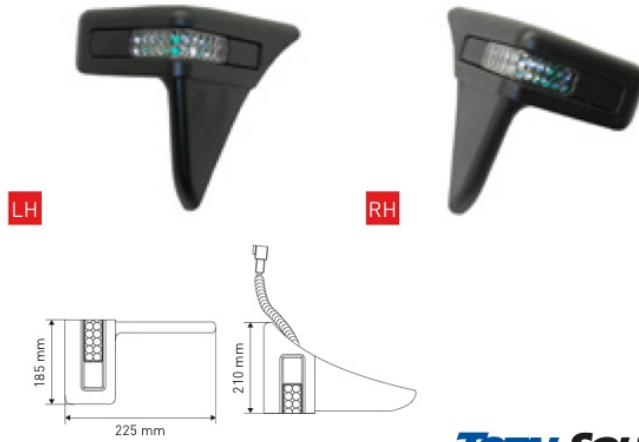


INDICATOR LIGHTS

INDICATOR LIGHTS



INDICATOR LIGHTS

STANDARD TURN SIGNAL LIGHTS




REF 151TA4006

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 28 mm
- 12V
- Bulb not included

REF 103TA4541 – Bulb: SV8.5-8 12V 18W


REF 150TA3789 – Replacement lens amber

REF 151TA3959

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 80 mm
- 12V
- Bulb not included

REF 106TA4830 – Bulb: SV 8.5-8 12V 5W


E-approved

TOTALSOURCE[®]

REF 151TA3960 - 12V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 69 mm
- Wire length: 350 mm
- Bulb included
- Connector: B2

REF 103TA4538 – Bulb: SV 8,5-8 12V 10W

TOTALSOURCE®

REF 151TA3976 – 12V

REF 151TA3977 - 48V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 60 mm
- Wire length: 260 mm
- Bulb included
- Connector: 1 x A1, 1 x H1

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 106TA4865 - Bulb: BA15S 48V 25W

REF 150TA1024 - Replacement lens


E-approved

TOTALSOURCE®

INDICATOR LIGHTS



STANDARD TURN SIGNAL LIGHTS




REF 151TA3979

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 45 mm
- 12-24V
- Bulb not included

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 103TA4603 – Bulb: BA15S 24V 21W

REF 151TA3980 – Replacement lens amber

TOTAL SOURCE[®]


REF 151TA3990 – 12V

REF 151TA3991 - 24V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 80 mm
- Wire length: 400 mm
- Bulb included
- Connector: F1, 2 x G1

REF 106TA4904 – Bulb: BAY15D 12V 23/8W

REF 100TA2250 - Bulb: BAY15D 24V 25/10W


TOTALSOURCE[®]REF 151TA3956

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 48 mm
- 12-24V
- Bulb not included

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 103TA4603 - Bulb: BA15S 24V 21W

REF 159TA9757 – Replacement lens



REF 151TA3985 - 48V

REF 151TA3986 - 56V

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 79 mm
- Wire length: 110 mm
- Bulb included
- Connector: 2 x G1

REF 103TA4625 - Bulb: BAY15D 48V 25W

REF 100TA2259 - Bulb: BAY15D 56V 25W

REF 150TA2605 – Replacement lens

TOTALSOURCE®

INDICATOR LIGHTS

INDICATOR LIGHTS




INDICATOR LIGHTS

STANDARD TURN SIGNAL LIGHTS

REF 151TA3987 - 48V

REF 151TA3986 – 56V

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 79 mm
- Wire length: 235 mm
- Bulb included
- Connector: 1 x D1, 1 x H1




REF 103TA4625 – Bulb: BAY15D 48V 25W

REF 100TA2259 – Bulb: BAY15D 56V 25W

REF 150TA2605 – Replacement lens

TOTAL SOURCE[®]REF [151TA3957](#)

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 42 mm
- 12-24V
- Bulb not included



REF 100TA2215 – Bulb: BA15S 12V 21W


REF 103TA4603 - Bulb: BA15S 24V 21W

REF 151TA3958 - Replacement lens



REF 151TA3992 - 12V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 79 mm
- Wire length: 140 mm
- Bulb included
- Connector: 1 x F1, 1 x G1




REF 100TA2215 – Bulb: BA15S 12V 21W

REF 150TA1027 – Replacement lens

TOTAL SOURCE®

REF 151TA3998 - 24V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 80 mm
- Wire length: 120 mm
- Bulb included
- Connector: 3 x H1



REF 106TA4875 – Bulb: BAY15D 24V 21/5W

REF 150TA1027 – Replacement lens front amber

TOTALSOURCE®

INDICATOR LIGHTS




STANDARD TURN SIGNAL LIGHTS

REF 151TA3994 - 12V

REF 151TA3995 - 24V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 60 mm
- Wire length: 260 mm
- Bulb included
- Connector: 1 x A1, 1 x H1



REF 100TA2191 – Bulb: BA15S 12V 10W

REF 106TA4855 – Bulb: BA15S 24V 12W



REF 151TA3997 – Replacement lens amber

REF 150TA1259 – Replacement lens red

TOTAL SOURCE[®]

REF 151TA3996 - 48V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 88 mm
- Wire length: 150 mm
- Bulb included
- Connector: 1 x A1, 2 x G1



REF 103TA4625 – Bulb: BAY15D 48V 25W


REF 151TA3997 – Replacement lens amber

REF 150TA1259 – Replacement lens red

TOTAL SOURCE[®]

REF 151TA3993 - 24V

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 86 mm
- Wire length: 140 mm
- Functions: turn, marker
- Bulb included
- Connector: 3 x G1




REF 123TA7989 – Bulb: BAY15D 24V 21W

REF 150TA4734 – Replacement lens amber

TOTAL SOURCE®

REF 151TA3999

- Technology: incandescent
- Mounting: 2 screws
- Centre distance: 59 mm
- 12-24V
- Bulb not included




REF 100TA2215 – Bulb: BA15S 12V 21W

REF 103TA4604 - Bulb: BA15S 24V 25W


TOTAL SOURCE[®]

INDICATOR LIGHTS

STANDARD TURN SIGNAL LIGHTS



- Technology: incandescent
- Mounting: 2 screws
- Center distance: 110 mm
- Wire length: 185 mm
- Functions: turn & marker
- Bulb included
- Connector: F1, 2 x G1


TOTAL SOURCE[®]

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 84 mm
- 12-24V
- Bulb not included

REF 103TA4603 - Bulb: BA15S 24V 21W



- Technology: incandescent
- Mounting: 2 screws
- Center distance: 140 mm
- Wire length: 250 mm
- Functions: turn, marker
- Bulbs included
- Connector: A1 & 2 x G1

**TOTAL SOURCE®**

INDICATOR LIGHTS




STANDARD TURN SIGNAL LIGHTS

REF [151TA3965](#) – 12V

REF [151TA3966](#) – 24V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 90 mm
- Wire length: 240 mm
- Functions: turn, marker
- Bulbs included
- Connector: 2 x G1



REF [103TA4586](#) – Bulb: BA15S 12V 10W

REF [100TA2215](#) – Bulb: BA15S 12V 21W

REF [123TA7984](#) – Bulb: BA15S 24V 10W

REF [103TA4603](#) – Bulb: BA15S 24V 21 W

REF [150TA3528](#) – Replacement lens

TOTALSOURCE®


REF [151TA4002](#) – 12V

REF [151TA4003](#) – 24V

REF [151TA4004](#) – 36V

REF [151TA4005](#) – 48V

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 149 mm
- Wire length: 300 mm
- Functions: turn, marker
- Bulbs included
- Connector: F3



REF [100TA2191](#) – Bulb: BA15S 12V 10W

REF [100TA2215](#) – Bulb: BA15S 12V 21W

REF [123TA7984](#) – Bulb: BA15S 24V 10W

REF [103TA4603](#) – Bulb: BA15S 24V 21 W

REF [122TA9120](#) – Bulb: BAY15D 36V 8W

REF [100TA2257](#) – Bulb: BAY15D 36V 25W


REF [103TA4598](#) – Bulb: BAY15D 48V 10W

REF [103TA4625](#) – Bulb: BAY15D 48V 25W


TOTALSOURCE®

INDICATOR LIGHTS


TWO-SIDED TURN SIGNAL LIGHTS



- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 385 mm
- Bulb included
- Connector: B2

TOTAL SOURCE[®]

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 220 mm
- Functions: turn, marker
- Bulbs included
- Connector: 2 x G1

TOTALSOURCE®

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 220 mm
- Functions: turn, marker
- Bulbs included
- Connector: H2

TOTALSOURCE®

INDICATOR LIGHTS


TOTAL SOURCE[®]**TOTAL SOURCE®**

Technical drawings of the LED light module showing front and side views with dimensions:

- Front View:** A square module with a width of 87 mm and a height of 87 mm. It features a circular lens with concentric rings and two small circular indicators on the left side.
- Side View:** A rectangular module with a width of 76 mm. It shows the profile of the module, including the mounting bracket and the cable connection at the bottom.


TOTAL SOURCE®

TWO-SIDED TURN SIGNAL LIGHTS




- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 380 mm
- Bulbs included
- Connector: 1 x F1, 2 x G1

REF 150TA2580 - Replacement lens rear

TOTAL SOURCE[®]

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 255 mm
- Functions: turn, marker
- Bulbs included
- Connector: 2 x G1

REF 150TA2580 – Replacement lens rear

TOTALSOURCE®

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 375 mm
- Functions: turn, marker
- Bulbs included
- Connector: C3

REF 150TA2580 – Replacement lens rear


TOTAL SOURCE®

INDICATOR LIGHTS



INDICATOR LIGHTS

STANDARD TURN SIGNAL LIGHTS



REF 151TA3941 – 12V


- Technology: incandescent
- Mounting: 2 screws
- Center distance: 39 mm
- Bulb not included

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 150TA5159 – Replacement lens

E-approved

TOTAL SOURCE®



REF 151TA3943 – Without bulb

REF 151TA3942 – 12V


- Technology: incandescent
- Mounting: 2 screws
- Center distance: 64 mm
- Connector: B2 built-in

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 150TA4693 – Replacement lens rear amber

E-approved

COBOO group



REF 151TA3944

- Technology: incandescent
- Mounting: 2 screws
- Center distance: 45 mm
- 12V
- Bulb not included

Red version, see page 126 (REF 151TA5982)

Green version, see page 155 (REF 151TA3265)

REF 103TA4541 – Bulb: SV 8,5-8 12V 18W

REF 150TA3793 – Replacement lens

REF 151TA3945 – Replacement base

E-approved


TOTAL SOURCE®

INDICATOR LIGHTS



INDICATOR LIGHTS


TWO-SIDED TURN SIGNAL LIGHTS



REF 151TA3946 - 12V

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 140 mm
- Functions: turn, marker
- Bulb included
- Connector: 1 x F1, 2 x G1

REF 123TA7988 – Bulb: BAY15D 12V 21/5W

TOTAL SOURCE[®]


REF 151TA3947 - 12V

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 240 mm
- Functions: turn, marker
- Bulbs included
- Connector: H2

REF 106TA4846 – Bulb: BA9S 12V 3W

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 151TA3948 – Replacement lens rear amber

TOTAL SOURCE[®]

REF 151TA3952 - 12V

REF 151TA3953 - 24V

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 220 mm
- Functions: turn, marker
- Bulbs included
- Connector: 2 x G1


REF 106TA4846 – Bulb: BA9S 12V 3W

REF 100TA2215 - Bulb: BA15S 12V 21W

REF 163TA8586 – Bulb: BA9S 24V 5W

REF **103TA4603** - Bulb: BA15S 24V 21W

REF 150TA2535 – Replacement lens rear

TOTALSOURCE®

REF 151TA3950 – 12V

- Technology: incandescent
- Mounting: single bolt M12
- Wire length: 350 mm
- Bulb included
- Connector: 2 x F1

REF 100TA2215 – Bulb: BA15S 12V 21W

REF 151TA3951 - Replacement lens front

REF 151TA3949 - Replacement lens rear amber

TOTALSOURCE®



ROTATING/FLASHING BEACONS